


# **Hansshow** MY/MYJ Side Mirror Cover with Turn Signal Installation Manual



Installation Video



Installation Manual



## **Tutorial Manual & Video**

Scan the QR code to get the manual & video

## **Need Help? Contact Us Now!**



**Call us at 1 (949) 992-7017**



**Email: [inquiry@hansshow.com](mailto:inquiry@hansshow.com)**



**<https://www.hansshow.com/>**

**If you have any questions**

**Installation: 19493584793**

## Warnings and Disclaimers

Important notice: You are welcome to purchase our company's products. In order to protect the legitimate rights and interests of users, we hereby remind users that you must carefully read and fully understand the terms of this statement before using this product. If you use this product, your use will be deemed to be an acknowledgment of the entire content of this statement, and you agree to be bound by the following terms of this statement, and at the same time bear the consequences caused by irregular use. Hansshow Company reserves the right to update the above documents. Please be sure to operate this product according to the instructions.

**Telephone:1 (949) 992-7017**

**Installation: 19493584793**

**Email: [inquiry@hansshow.com](mailto:inquiry@hansshow.com)**


**(UTC-7/PST)9:00AM-6.30PM (Monday to Friday)**

## Precautions for Use

- 1-Before installation, check whether the product list is complete or damaged.
- 2-The installation instructions may be slightly different from the actual operation. If there is any difference, please contact us according to the actual situation.
- 3-Warning: Please do not disassemble any parts by yourself. Any improper operation is not covered by the warranty.
- 4-Before installing the product, watch the installation video and instructions.
- 5-Check whether the installed product functions normally.


## Installation Video

Scan the QR code



# Hansshow MY/MYJ Side Mirror Cover with Turn Signal Installation Manual


## Package Included:

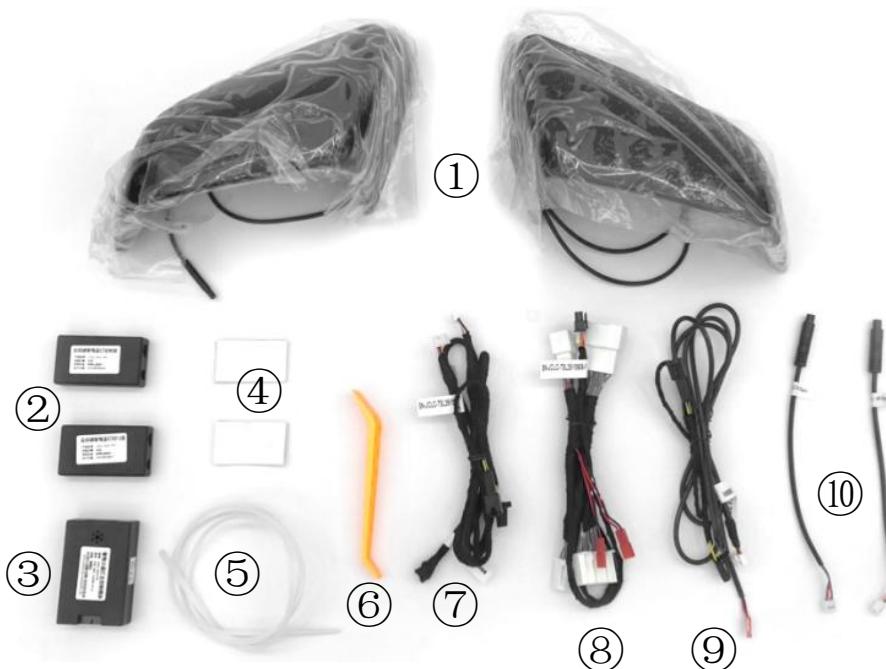


①	Turn Signal Light*2	②	Left and Right Control Box*2
③	Main Control Box*1	④	Double-sided Tape*2
⑤	Wire Guide*1	⑥	Pry Tool*1
⑦	Left Power Cable*1	⑧	Main Power Cable*1
⑨	Right Power Cable*1	⑩	Turn Signal Extension Cable*2

NOTE: For faster installation, be sure to read these instructions carefully.

**Hansshow** MY/MYJ Side Mirror Cover with Turn Signal - Wiring Diagram

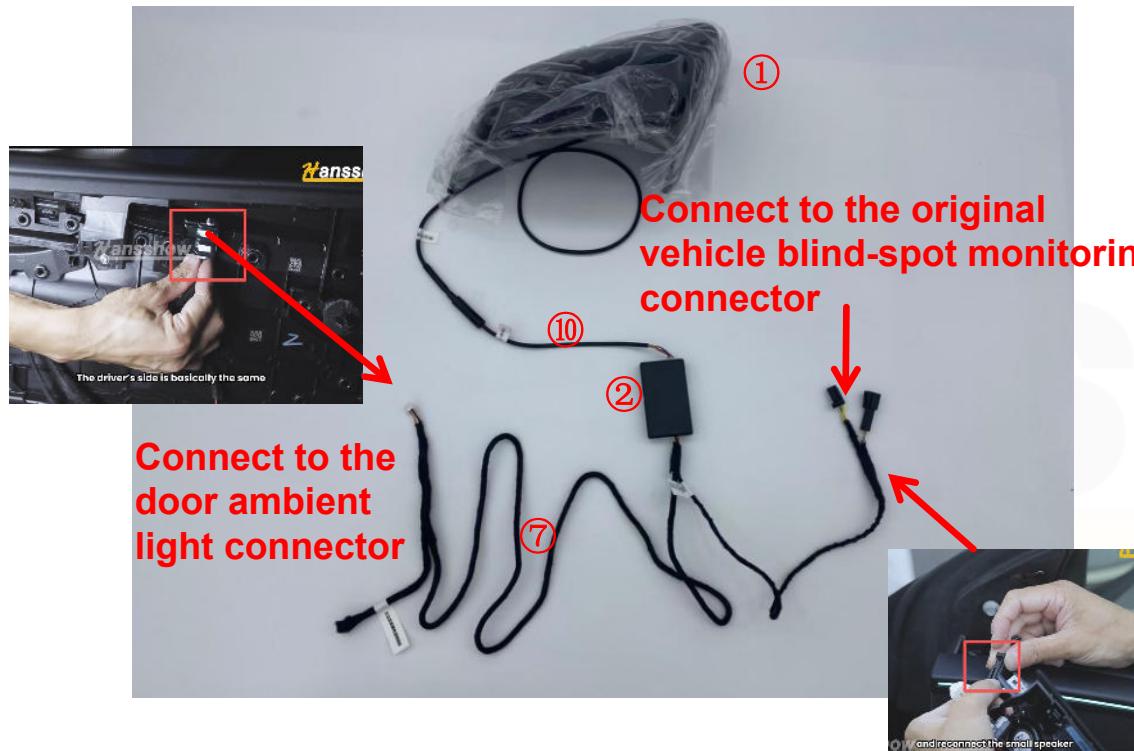

## Left-Side Wiring Diagram

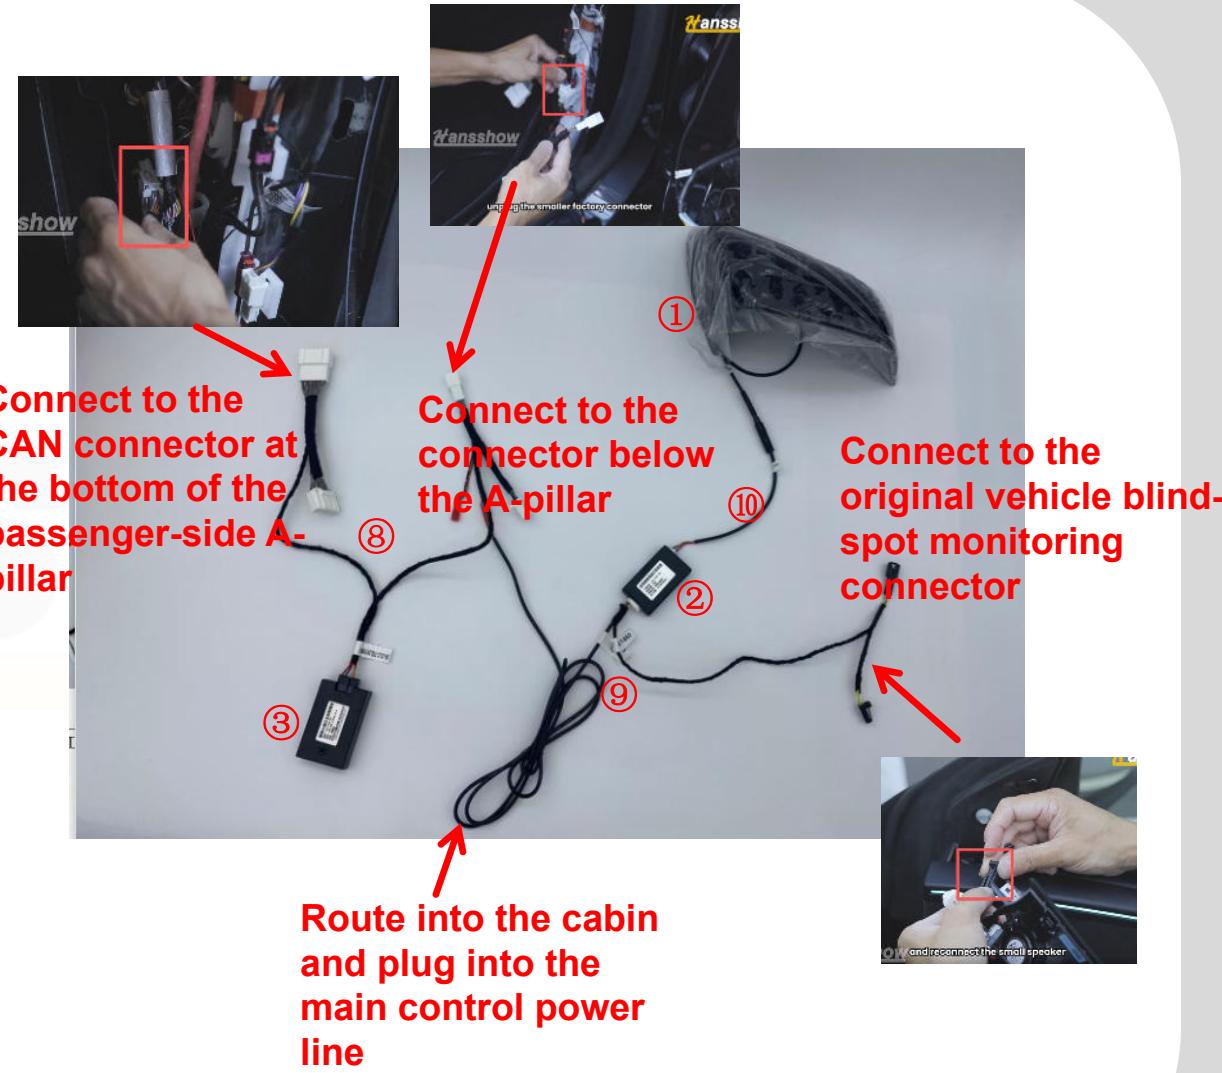



1. Remove the original side mirror cover from the bottom up (same for both sides).



3. Unplug the speaker connector and remove the speaker clip (same for both sides).




2. Remove the speaker (same for both sides).




4. Remove the red reflective trim on the side of the door panel (same for both sides).

# Hansshow MY/MYJ Side Mirror Cover with Turn Signal Installation Manual

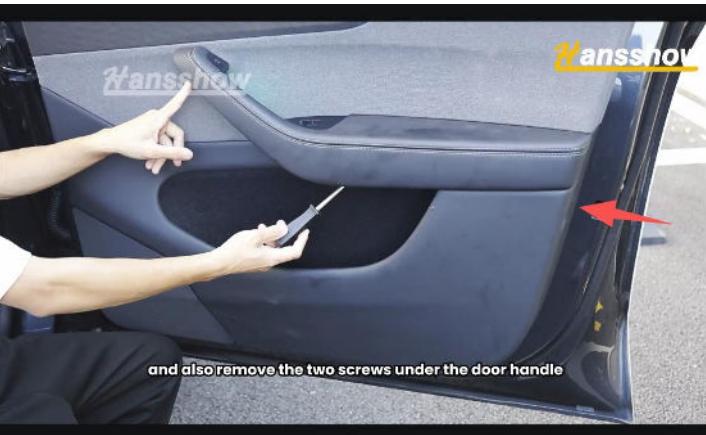


5. Remove the three screws securing the door panel (same for both sides).

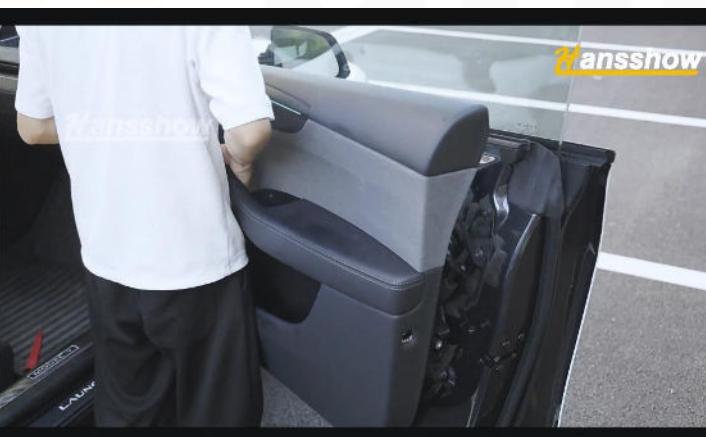

7. Remove the door panel (same for both sides).



6. Pry open the door panel from the bottom using a pry tool (same for both sides).

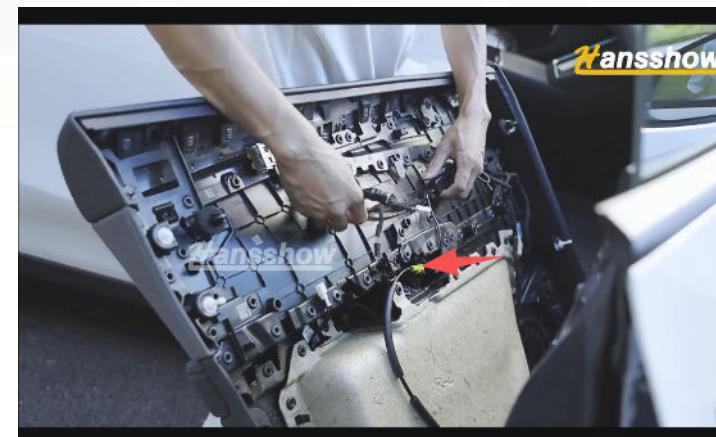

8. Remove the sound insulation and disconnect all wiring harness connectors and the emergency handle from the door panel (same for both sides).



9. Unplug the side mirror connector (same for both sides).



10. Remove the side mirror wiring harness clip (same for both sides).



11. Remove the rubber plug covering the side mirror mounting screws (same for both sides).



12. Unclip the side mirror rubber trim (same for both sides).

# Hansshow MY/MYJ Side Mirror Cover with Turn Signal Installation Manual



13. Remove the three screws securing the side mirror (same for both sides).



15. Remove the screws securing the side mirror lower cover (same for both sides).



14. Lift out the side mirror (same for both sides).



16. First remove the soft rubber on the bottom side of the side mirror (same for both sides).

# Hansshow MY/MYJ Side Mirror Cover with Turn Signal Installation Manual



17. Remove the bottom rubber pad to one side as shown (same for both sides).



19. Route the turn signal wiring harness from the mirror housing to the bottom as shown (same for both sides).



18. Use a pry tool from the side to slowly pry open the lower cover as shown (same for both sides).



20. Install the new side mirror cover with turn signal (same for both sides).

# Hansshow MY/MYJ Side Mirror Cover with Turn Signal Installation Manual



21. Route the turn signal wiring along the original wiring harness (same for both sides).



22. Reinstall the lower cover (same for both sides).



23. Reinstall the bottom rubber pad (same for both sides).



24. Reinstall the screws securing the lower cover (same for both sides).




25. Reinstall the side mirror (same for both sides).



26. Tighten the side mirror screws as shown (same for both sides).



27. Reinstall the rubber plug on the side mirror screws as shown (same for both sides).

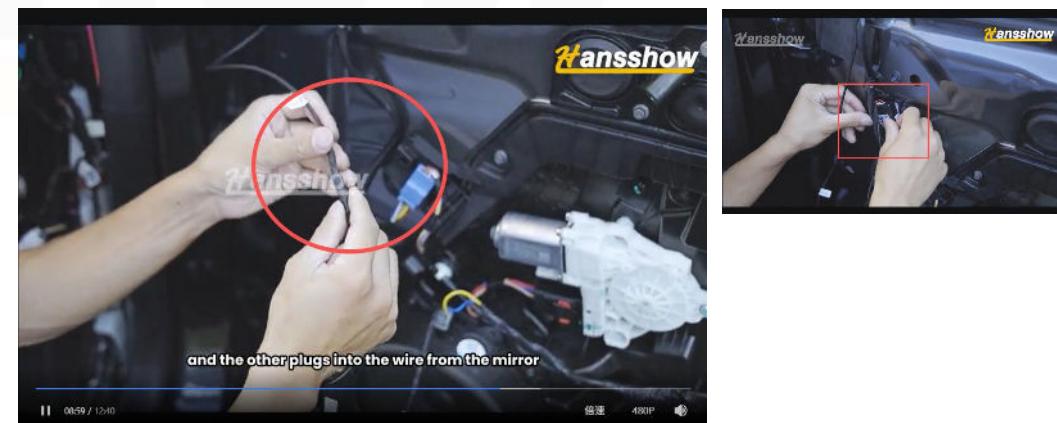


28. Connect the turn signal extension cable to the turn signal harness, then plug into the auxiliary control box, and secure the control box at the position shown (same for both sides).

# MY/MYJ Side Mirror Cover with Turn Signal Installation Manual (Left Side Wiring Steps)



29. Unplug the original door ambient light connector.

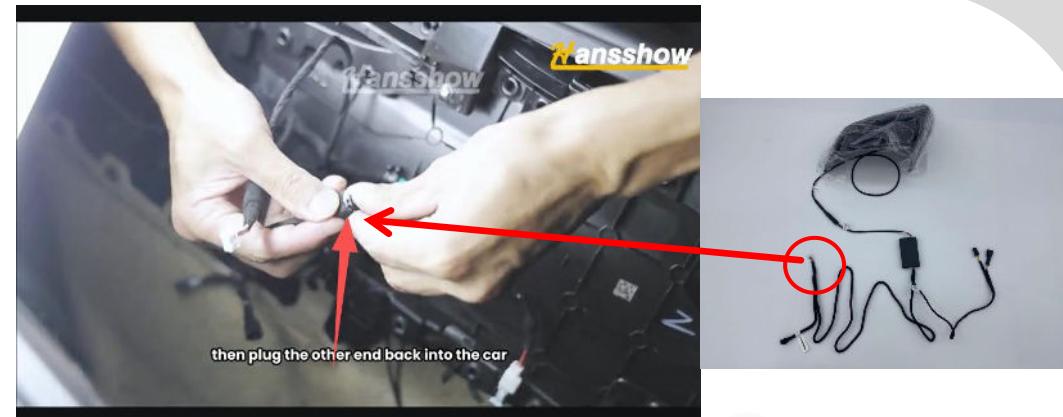

30. Connect the left-side power adapter to the original ambient light connector.



31. After connection, plug into the original ambient light.

# MY/MYJ Side Mirror Cover with Turn Signal Installation Manual (Right Side Wiring Steps)



29.Remove the speaker.



30.Route one end of the right-side power cable to the rubber waterproof tube.



31.Remove the rubber tube connecting the door and the body.



32.Pass the wire guide through the rubber waterproof tube.

# MY/MYJ Side Mirror Cover with Turn Signal Installation Manual

## (Right Side Wiring Steps)



33. Fix the ⑨ right-side power extension cable to the wire guide.



34. Reinstall the speaker.



35. Remove the right front door edge seal.



36. Remove the triangular trim panel on the right side of the dashboard.

# **Hansshow** MY/MYJ Side Mirror Cover with Turn Signal Installation Manual (Right Side Wiring Steps)




37.Remove the clips securing the door sill trim.



39.Connect the main control box power properly.




38.Remove the door sill trim.

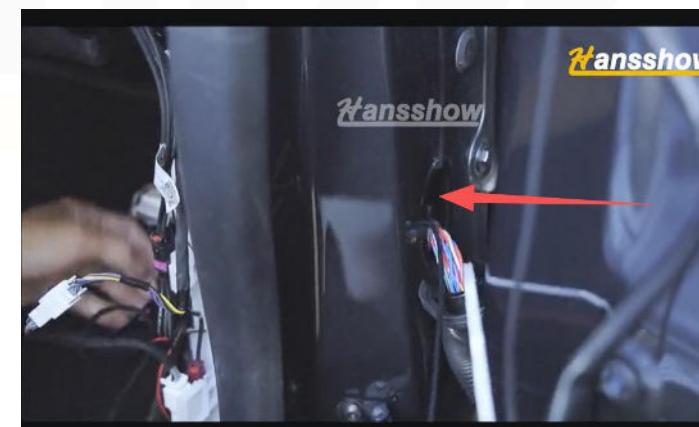


40.Route the right-side power cable along the original harness into the cabin and connect it to the main power cable.



41. Reinstall the rubber waterproof tube.

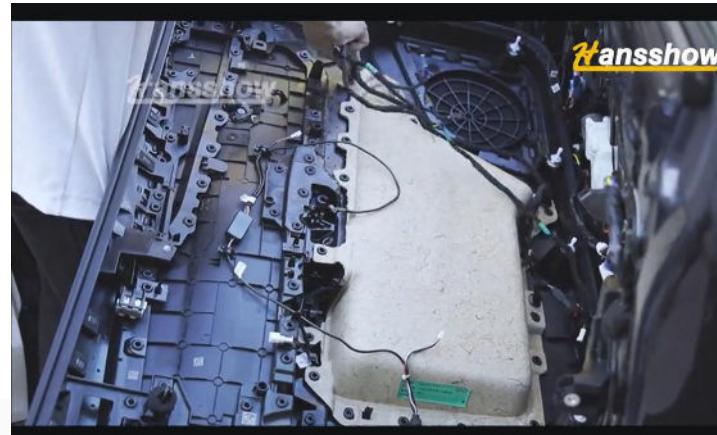

42. Reconnect the door edge wiring harness connector (same for both sides).

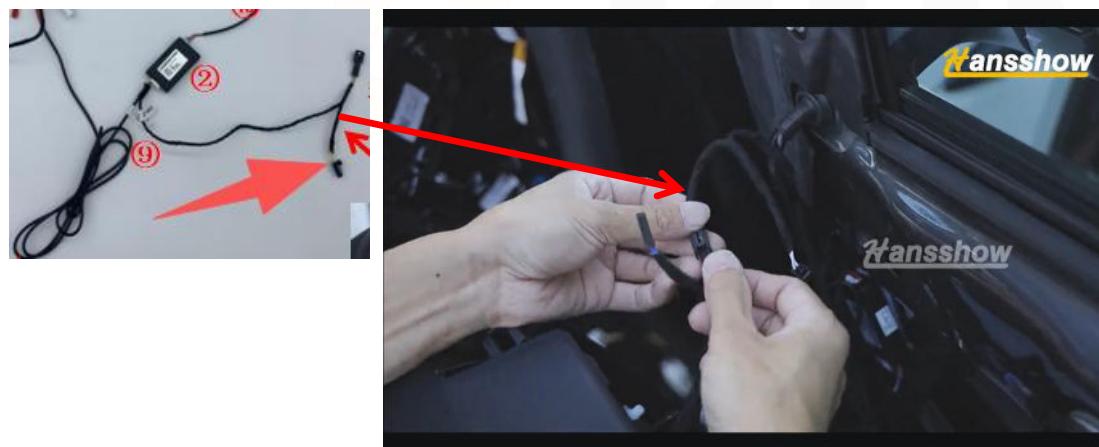

43. Connect the blind spot monitoring connector on the power cable to the original blind spot connector (same for both sides).



44. Reinstall the door panel and tighten the screws (same for both sides).

# Hansshow MY/MYJ Side Mirror Cover with Turn Signal Installation Manual



45. Plug in the blind spot monitoring connector and speaker connector, then reinstall the speaker (same for both sides).



47. Reinstall the dashboard triangular trim panel.



46. Reinstall the door sill trim and secure with clips.



48. Reinstall the door edge seal. Installation completed.

Problem	Cause	Solution
Turn signal not working	Wiring harness not connected properly	Reconnect the wiring harness
One side works, the other side does not	1. Control box issue 2. Wiring harness not plugged in correctly	1. Replace the control box 2. Reconnect the wiring harness
Blind spot monitoring not working	Wiring harness not connected properly	Reconnect the wiring harness
Left turn signal always on	Main control box issue	Replace the main control box

# Installation Manual

Hansshow provides 1-year extended warranty service.  
Send us your customer number to get 1-year full warranty.

**Message and Telephone: +1949-992-7017**  
**Installation Appointment: +1 (949) 358-4793**  
**Email: [inquiry@hansshow.com](mailto:inquiry@hansshow.com)**  
**(UTC-7/PST)9:00AM-6.30PM (Monday to Friday)**



[www.hansshow.com](http://www.hansshow.com)

Designed by HANSSHOW

# **Hansshow** Warranty and Support

## Need Help? Contact Us Now!

If you have any questions, please contact us at

  **1 (949) 992-7017**

(UTC-7/PST)9:00AM-6.30PM (Monday to Friday)

Installation: 19493584793     [inquiry@hansshow.com](mailto:inquiry@hansshow.com)     [www.hansshow.com](http://www.hansshow.com)

Before contacting our customer support, please have your **order number, videos, or images** (if needed) ready for a fast and great solution. Send your customer number to get Hansshow **one-year** extended warranty.