




## MYJ/HLM3 Electric Multi-Touch Pop-Out Door Handles Kit Installation Manual



Installation Manual



### Tutorial Manual & Video

Scan the QR code to get the manual & video

## Need Help? Contact Us Now!



Call us at **1 (949) 992-7017**



Email: [inquiry@hansshow.com](mailto:inquiry@hansshow.com)



<https://www.hansshow.com/>

If you have any questions

Installation: **19493584793**

## Warnings and Disclaimers

Important notice: You are welcome to purchase our company's products. In order to protect the legitimate rights and interests of users, we hereby remind users that you must carefully read and fully understand the terms of this statement before using this product. If you use this product, your use will be deemed to be an acknowledgment of the entire content of this statement, and you agree to be bound by the following terms of this statement, and at the same time bear the consequences caused by irregular use. Hansshow Company reserves the right to update the above documents. Please be sure to operate this product according to the instructions.

**Telephone: 1 (949) 992-7017**

**Installation: 19493584793**

**Email: [inquiry@hansshow.com](mailto:inquiry@hansshow.com)**


**(UTC-7/PST)9:00AM-6.30PM (Monday to Friday)**

## Precautions for Use

- 1-Before installation, check whether the product list is complete or damaged.
- 2-The installation instructions may be slightly different from the actual operation. If there is any difference, please contact us according to the actual situation.
- 3-Warning: Please do not disassemble any parts by yourself. Any improper operation is not covered by the warranty.
- 4-Before installing the product, watch the installation video and instructions.
- 5-Check whether the installed product functions normally.

## Installation Video

Scan the QR code



## Package Included:




①	Right door electric handle*2	②	Left door electric handle*2
③	Control box*1	④	Electric door handle clip kit*1
⑤	Power wiring harness*1	⑥	Left front door handle wiring harness*1
⑦	Left rear door handle wiring harness*1	⑧	Right front door handle wiring harness*1
⑨	Right rear door handle wiring harness*1	⑩	
⑪			


NOTE: For faster installation, be sure to read these instructions carefully.



1. Remove the right front door edge rubber strip (same on both sides).

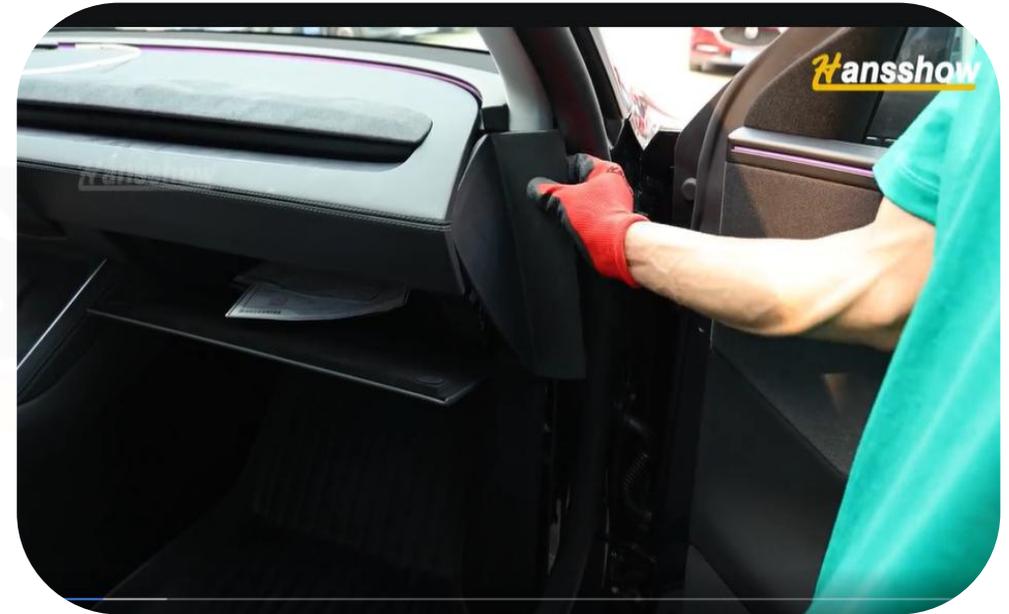


2. Remove the passenger-side dashboard triangular trim panel as shown (same for both sides).

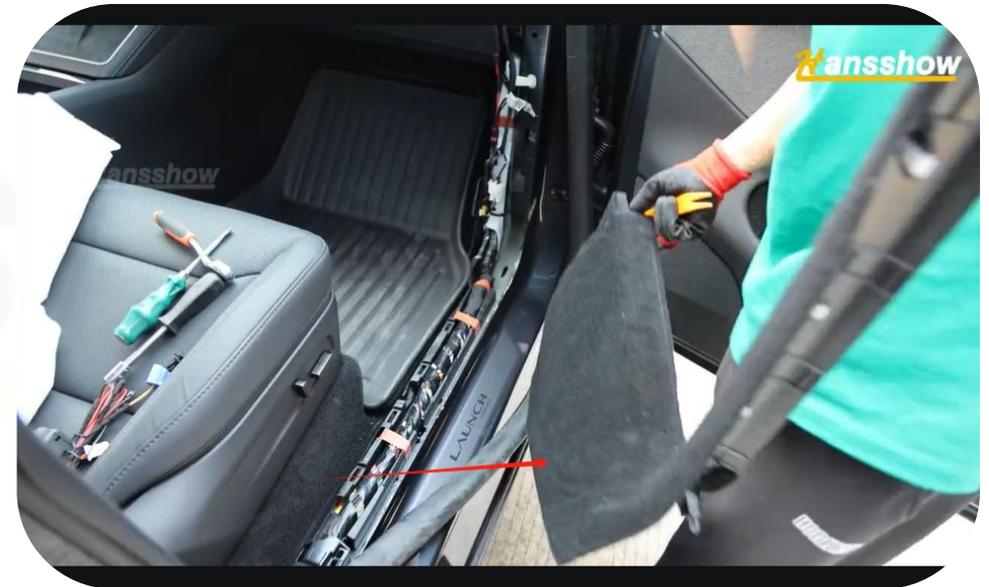


3. Remove the door sill trim clips, then take off the door sill trim (same on both sides).



4. Fix the control box negative (black) power wire to the position shown.

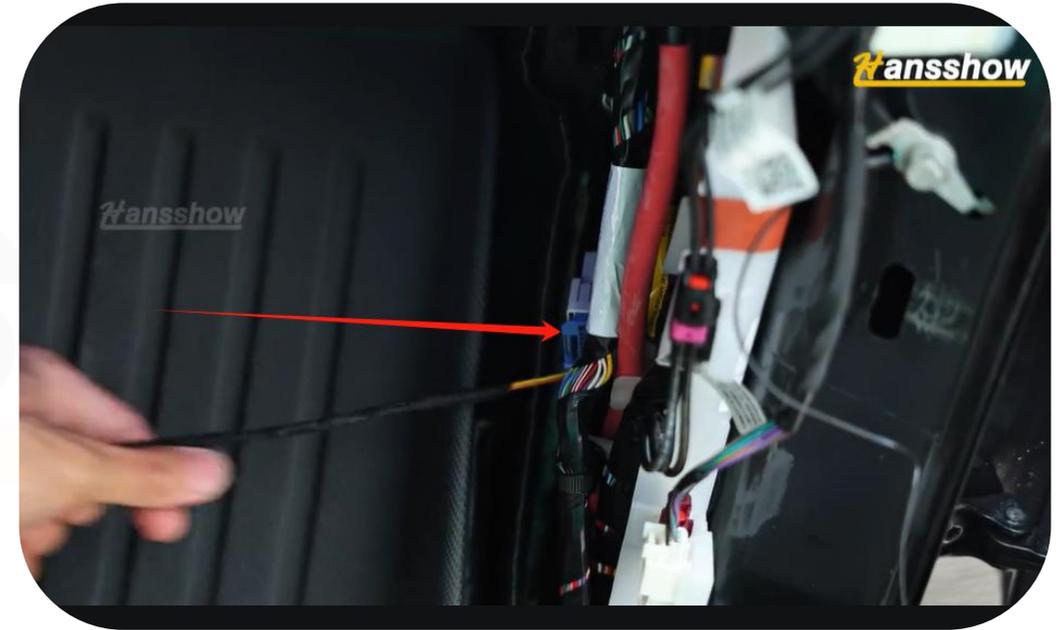


5. Plug the control box signal wire connector into the position shown.

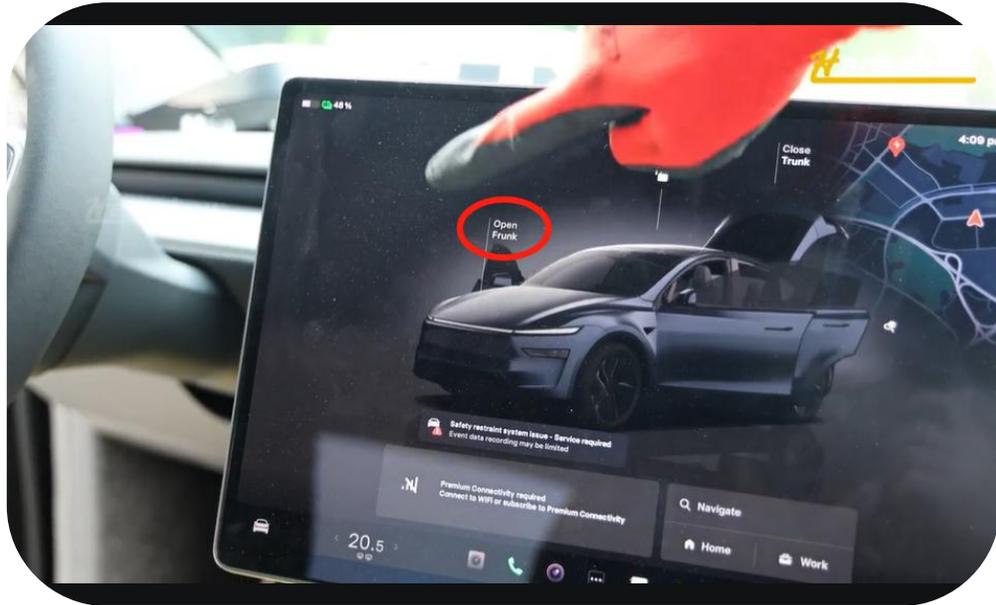



6. Open the front trunk lid and remove the trim panel as shown.




7. Locate the main wiring harness grommet and cut off one raised point as shown.

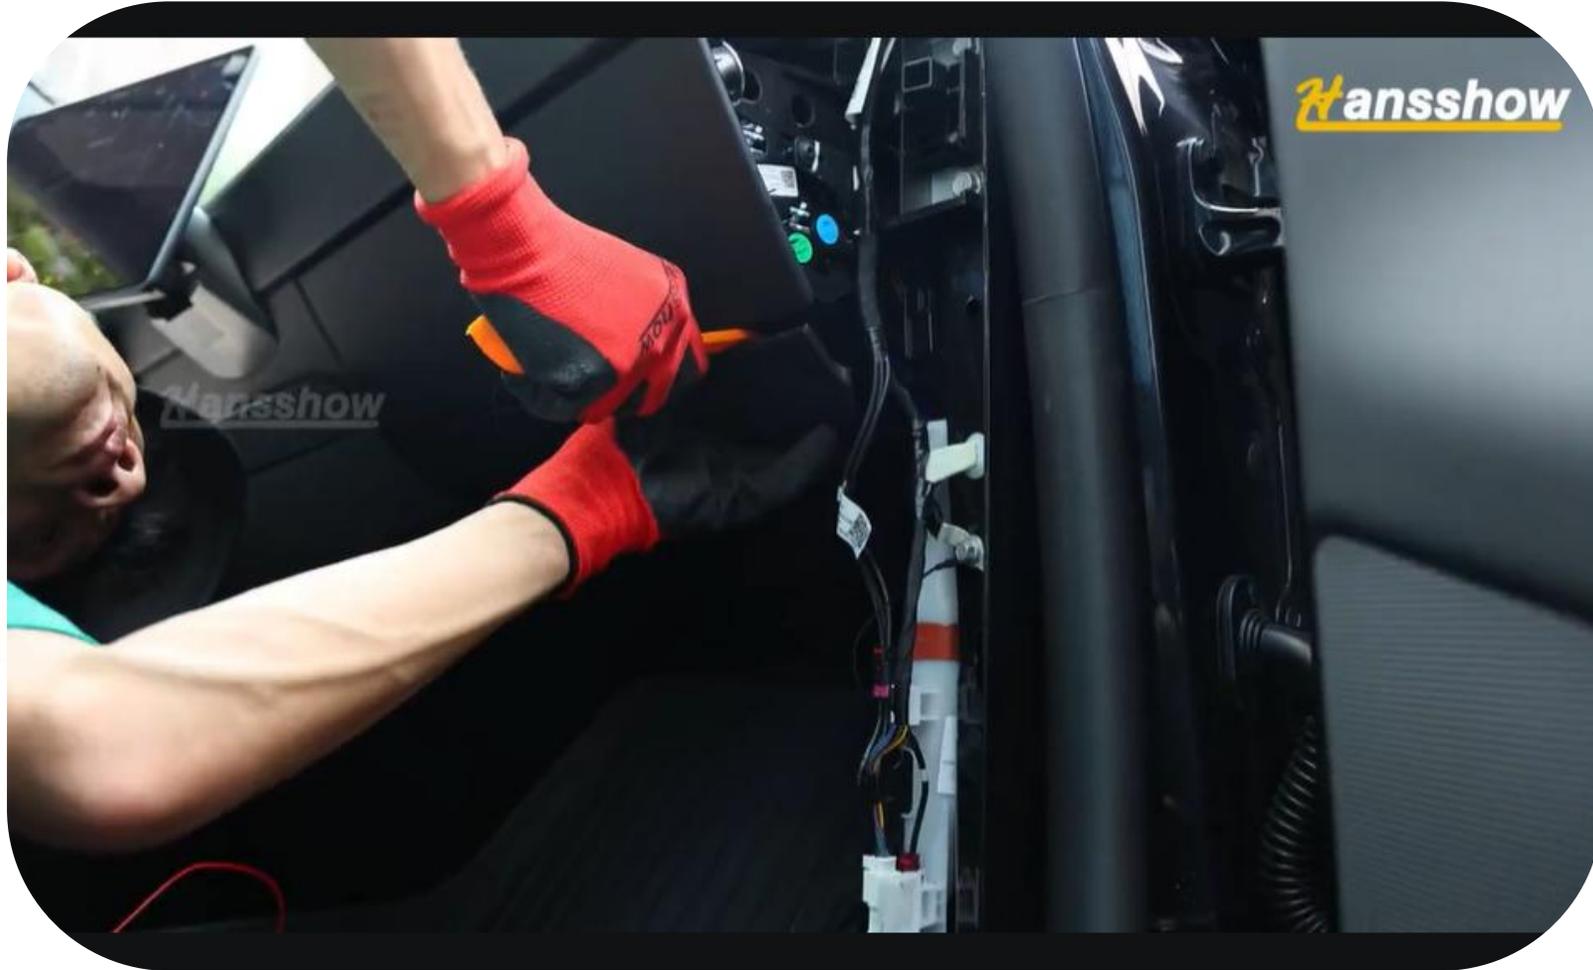

8.Remove the right front footwell trim panel.

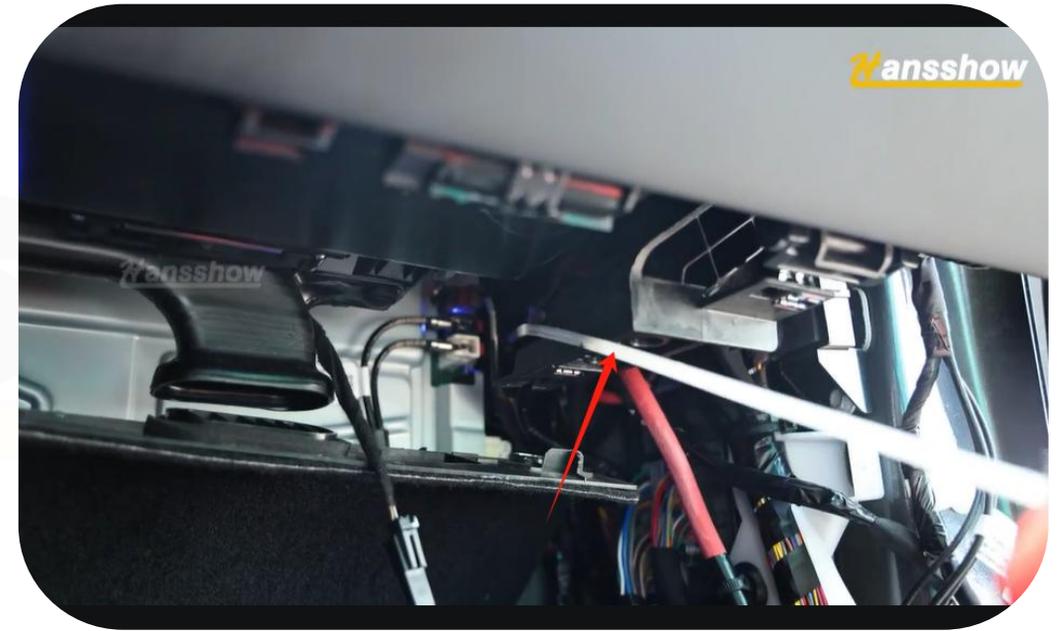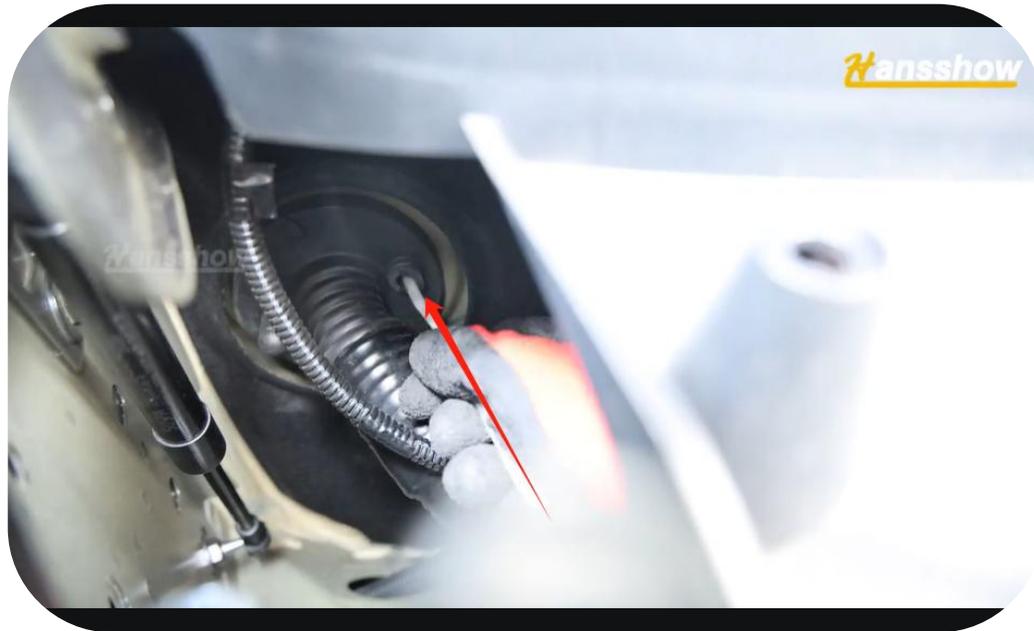


9.Pass the wire puller through the cut in the rubber tube as shown.

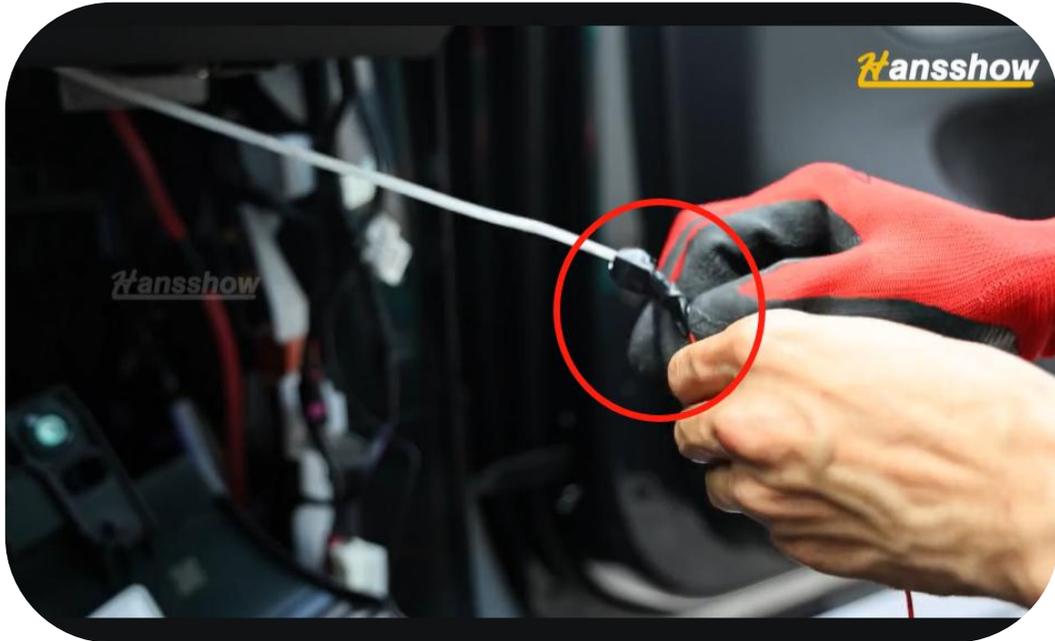


10. Attach the positive (red) power wire to the wire puller and pull it into the front trunk.



11. Secure the positive power wire at the red rubber location in the front trunk using a nut (see installation video if unclear).

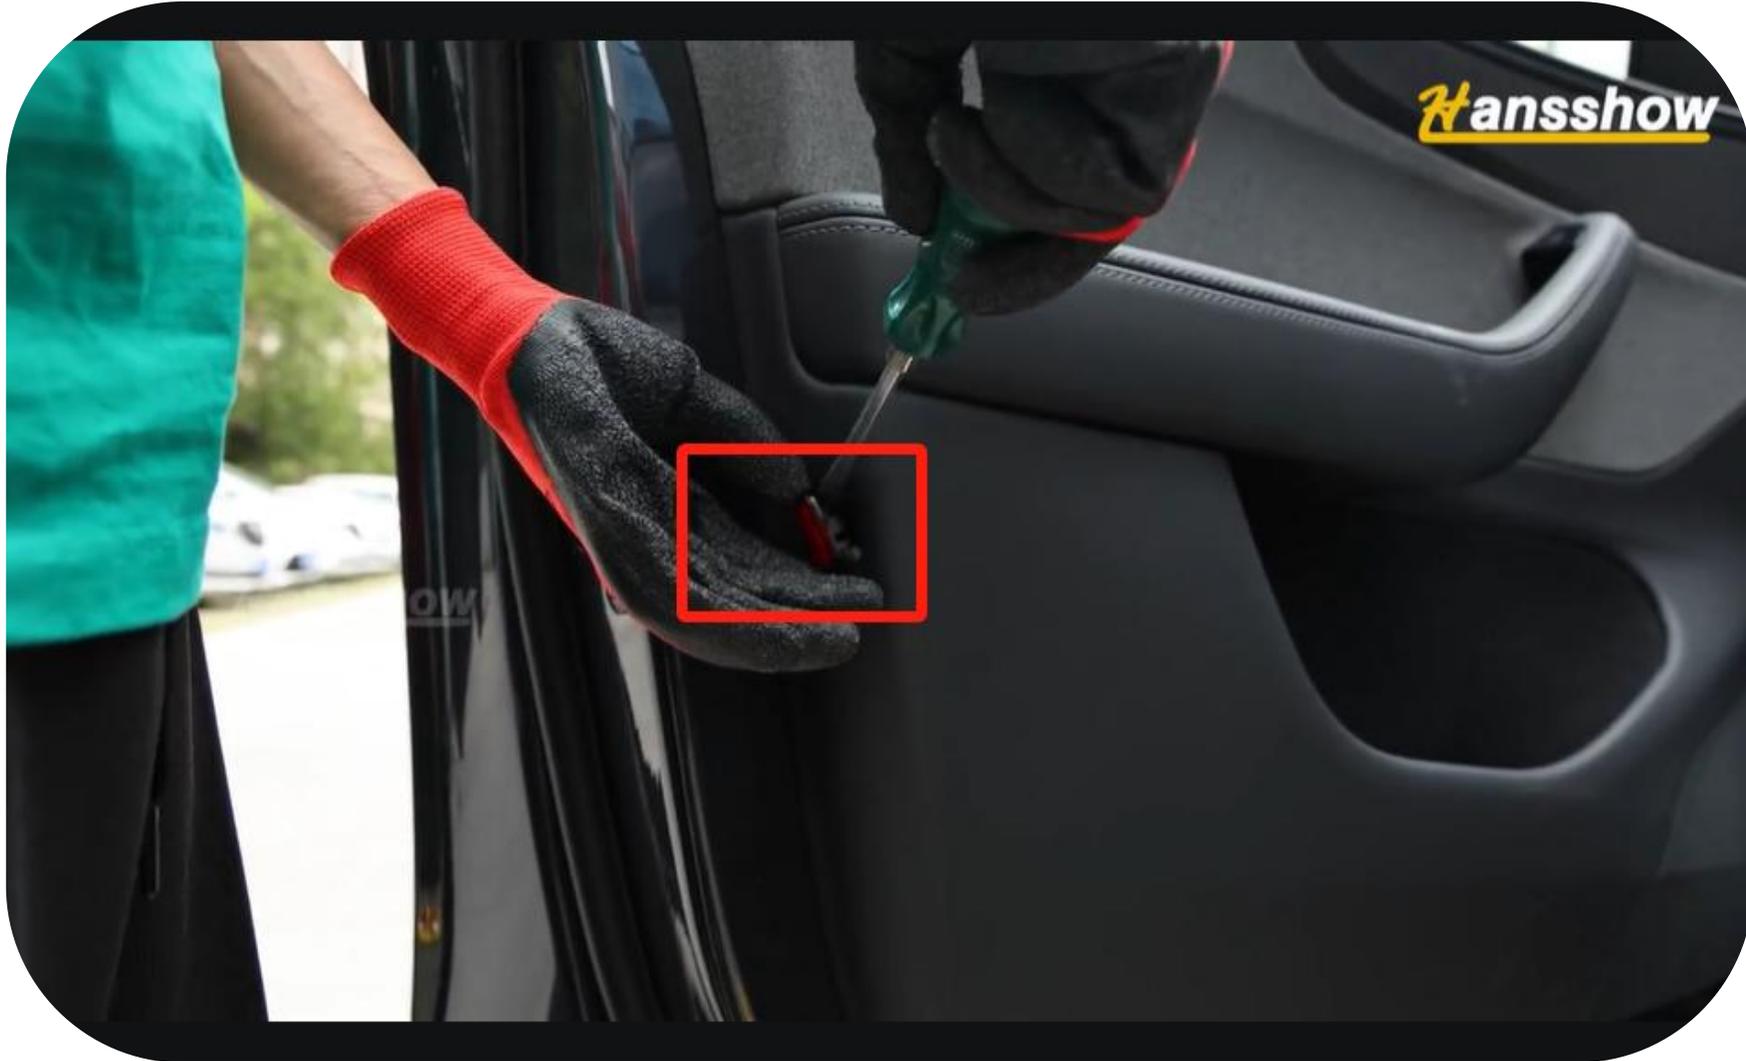


12. Use a flathead screwdriver to remove the front door reflector trim panel—be careful not to damage the original door panel surface (same for both front doors).

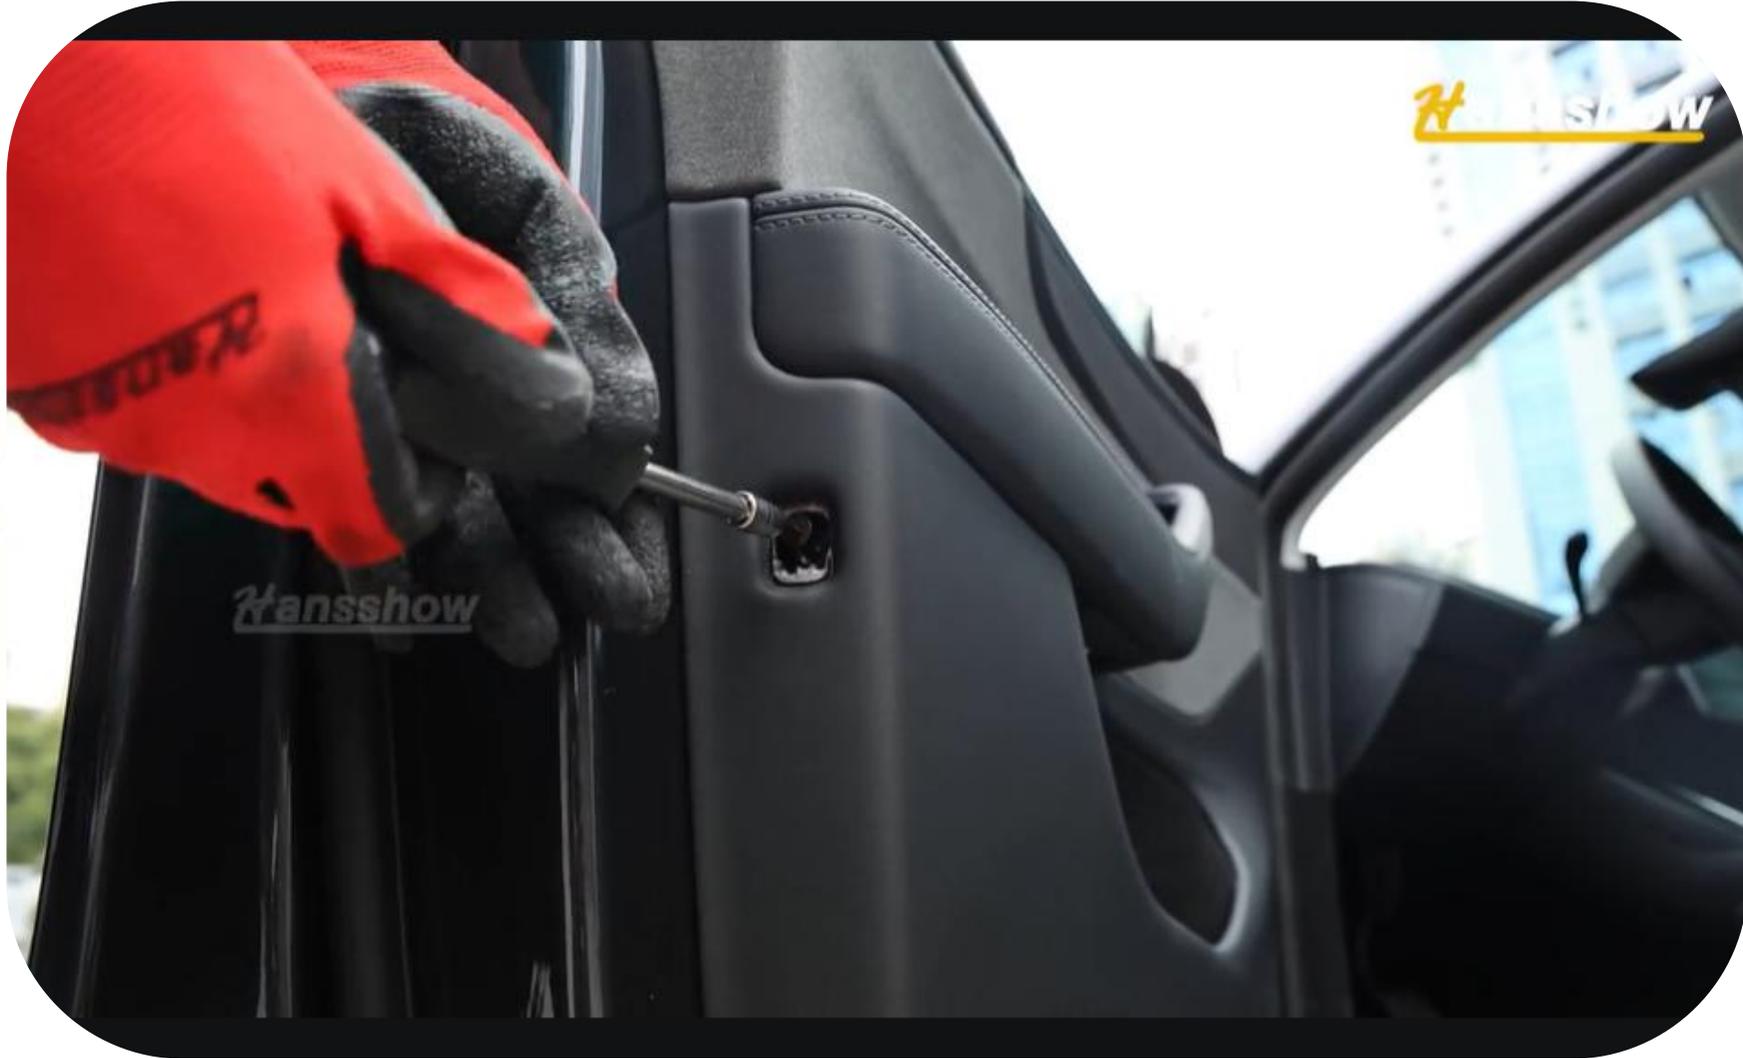



13. Remove the side fixing screws on the door panel (same for both front doors).



14. Remove the front fixing screws on the door panel (same for both front doors).

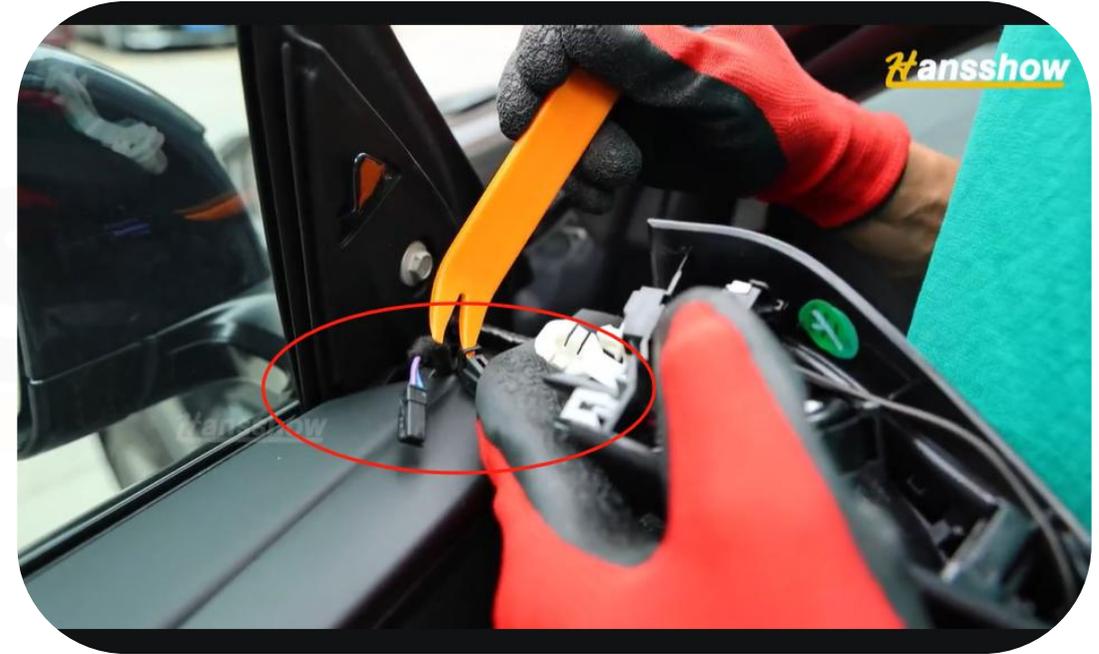

15. Remove the tweeter and unplug its connector (same for both front doors).

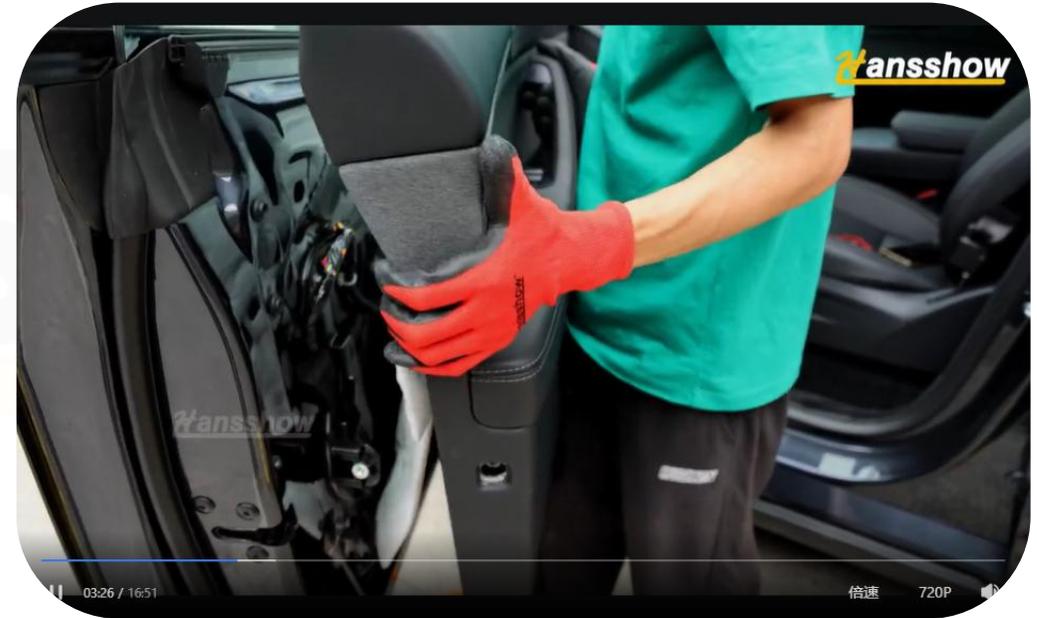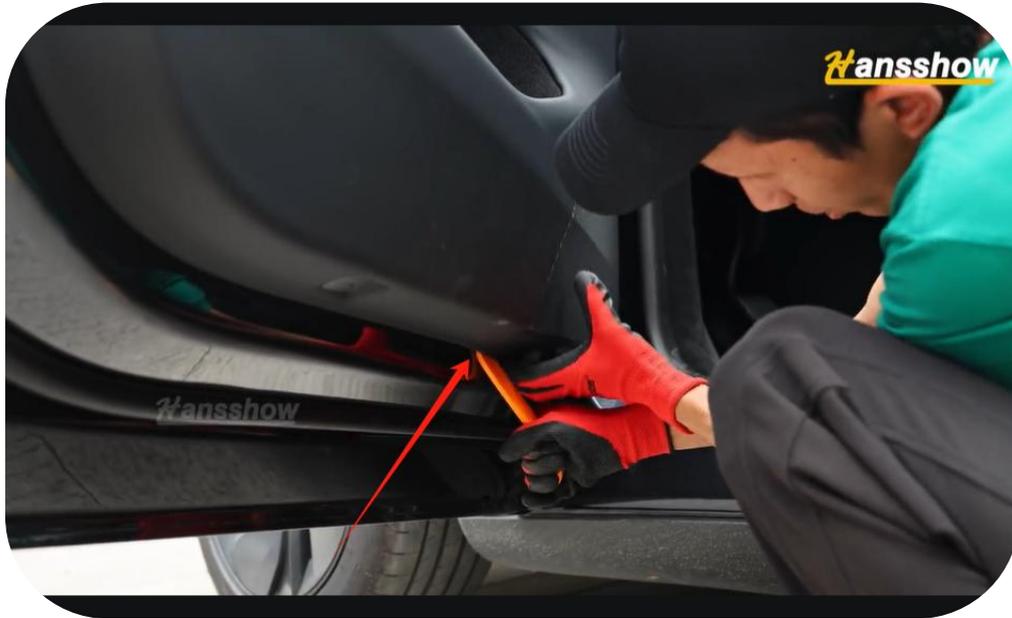



16. Pry open the door panel from the bottom using a plastic trim tool, then remove it (same for both front doors).



17.Remove all harnesses and clips on the door panel (same for both front doors).




18. Remove the window fixing rubber strip (same for both front doors).

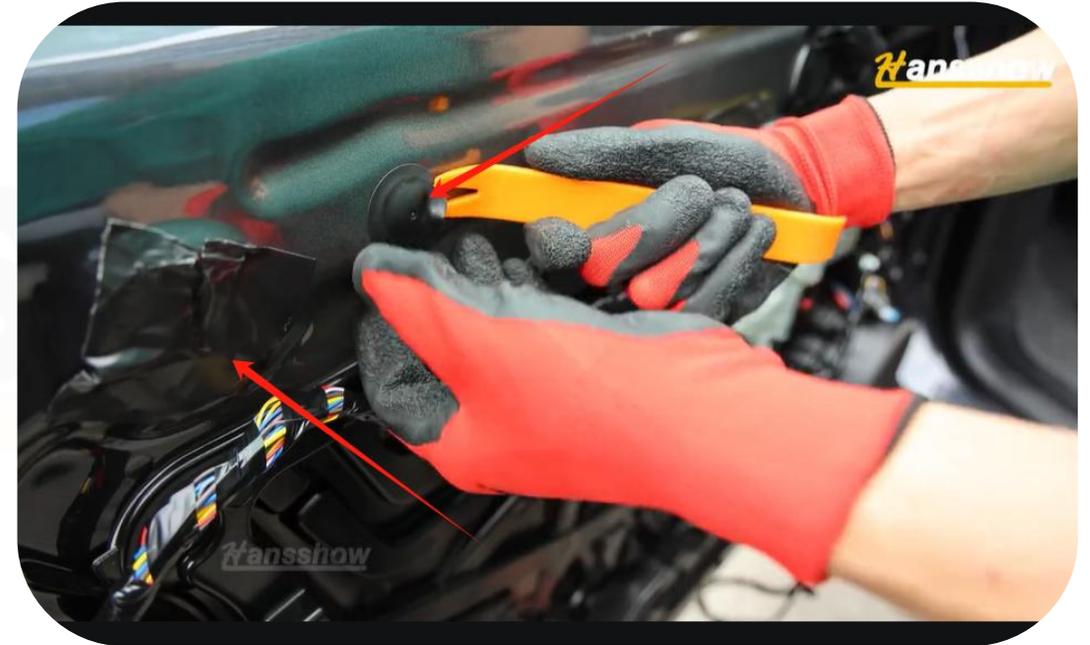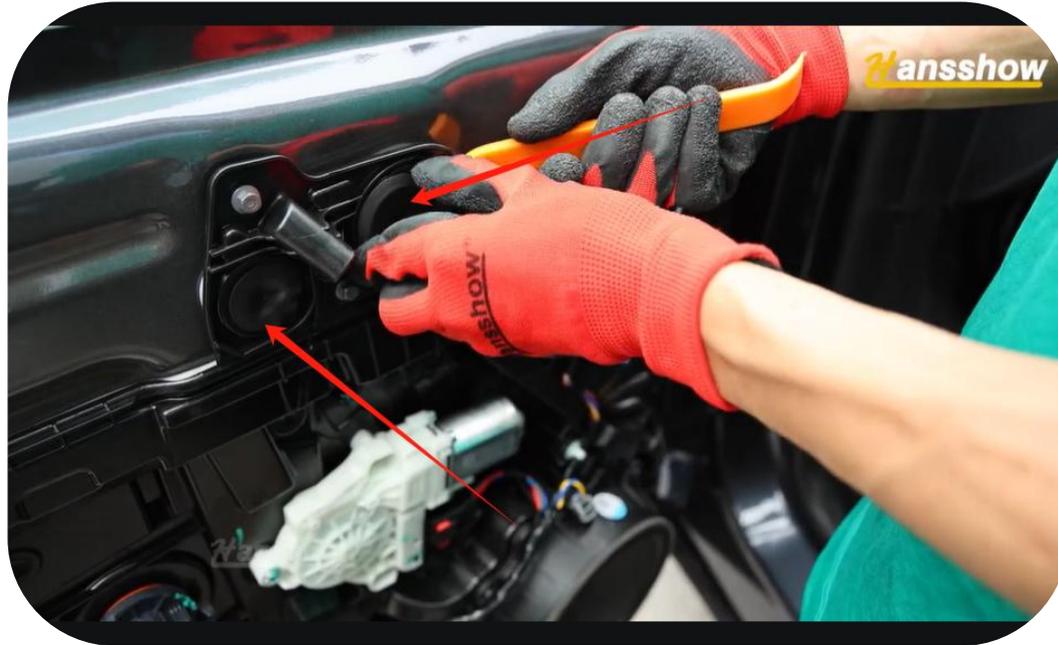

19. Remove the rubber grommet as shown (same for both front doors).




20. Apply masking tape on the outside of the door and window to prevent misalignment (same for both sides).

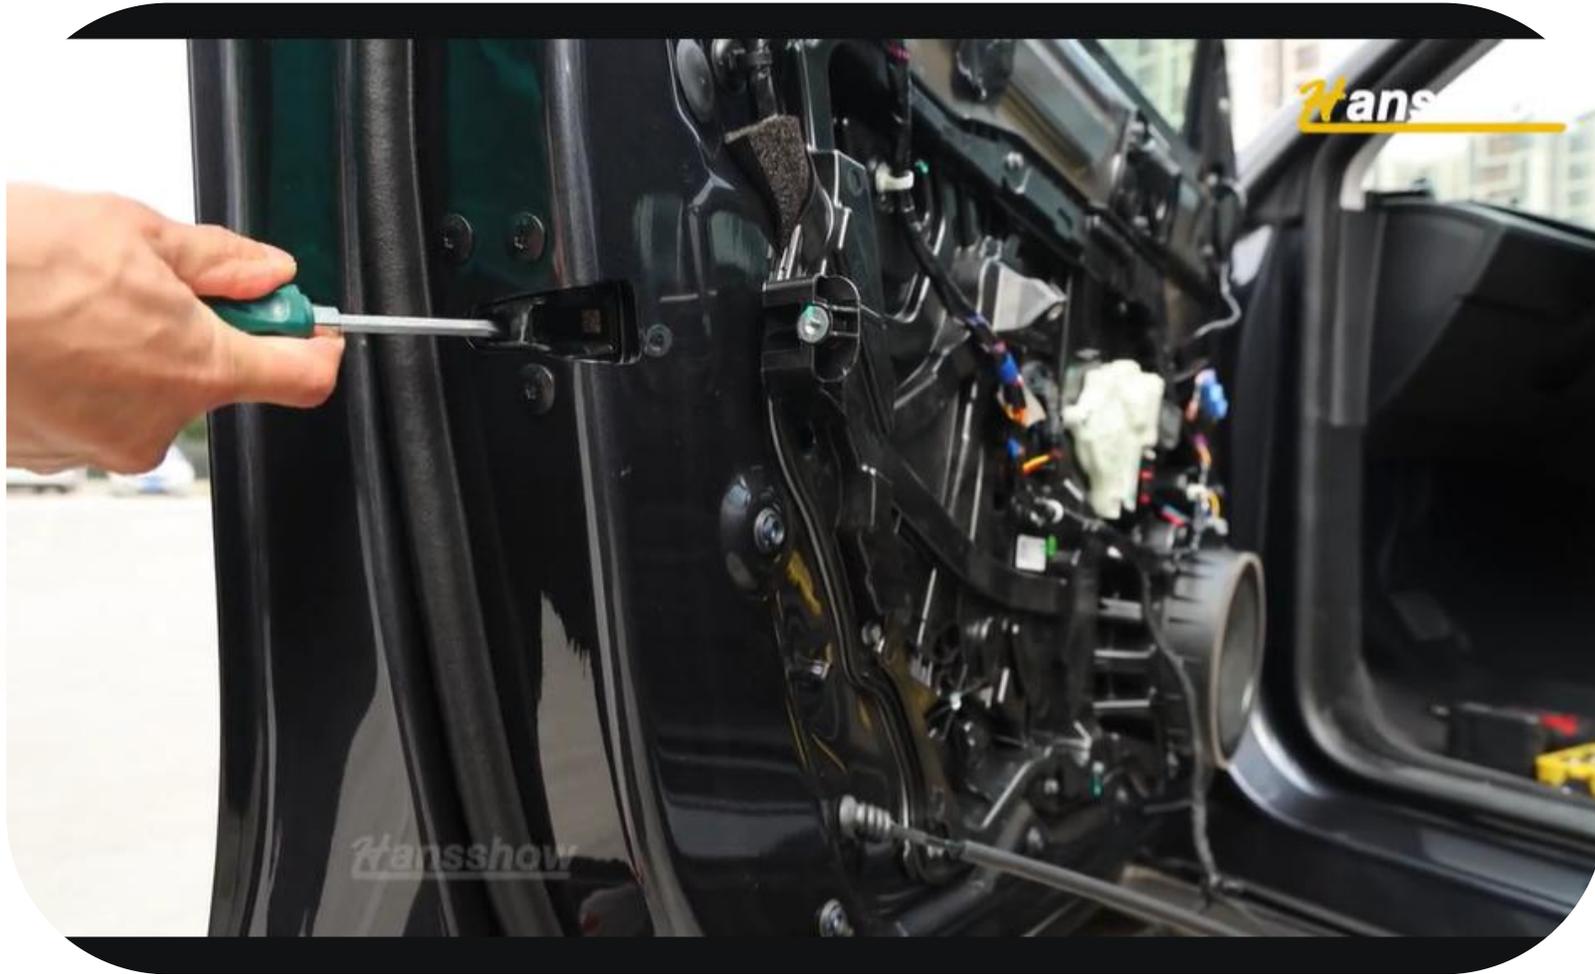

21. Use a screwdriver to push down the door lock (same for both sides).



22. Use a 10mm socket to remove the outer glass fixing screw and loosen the inner screw.

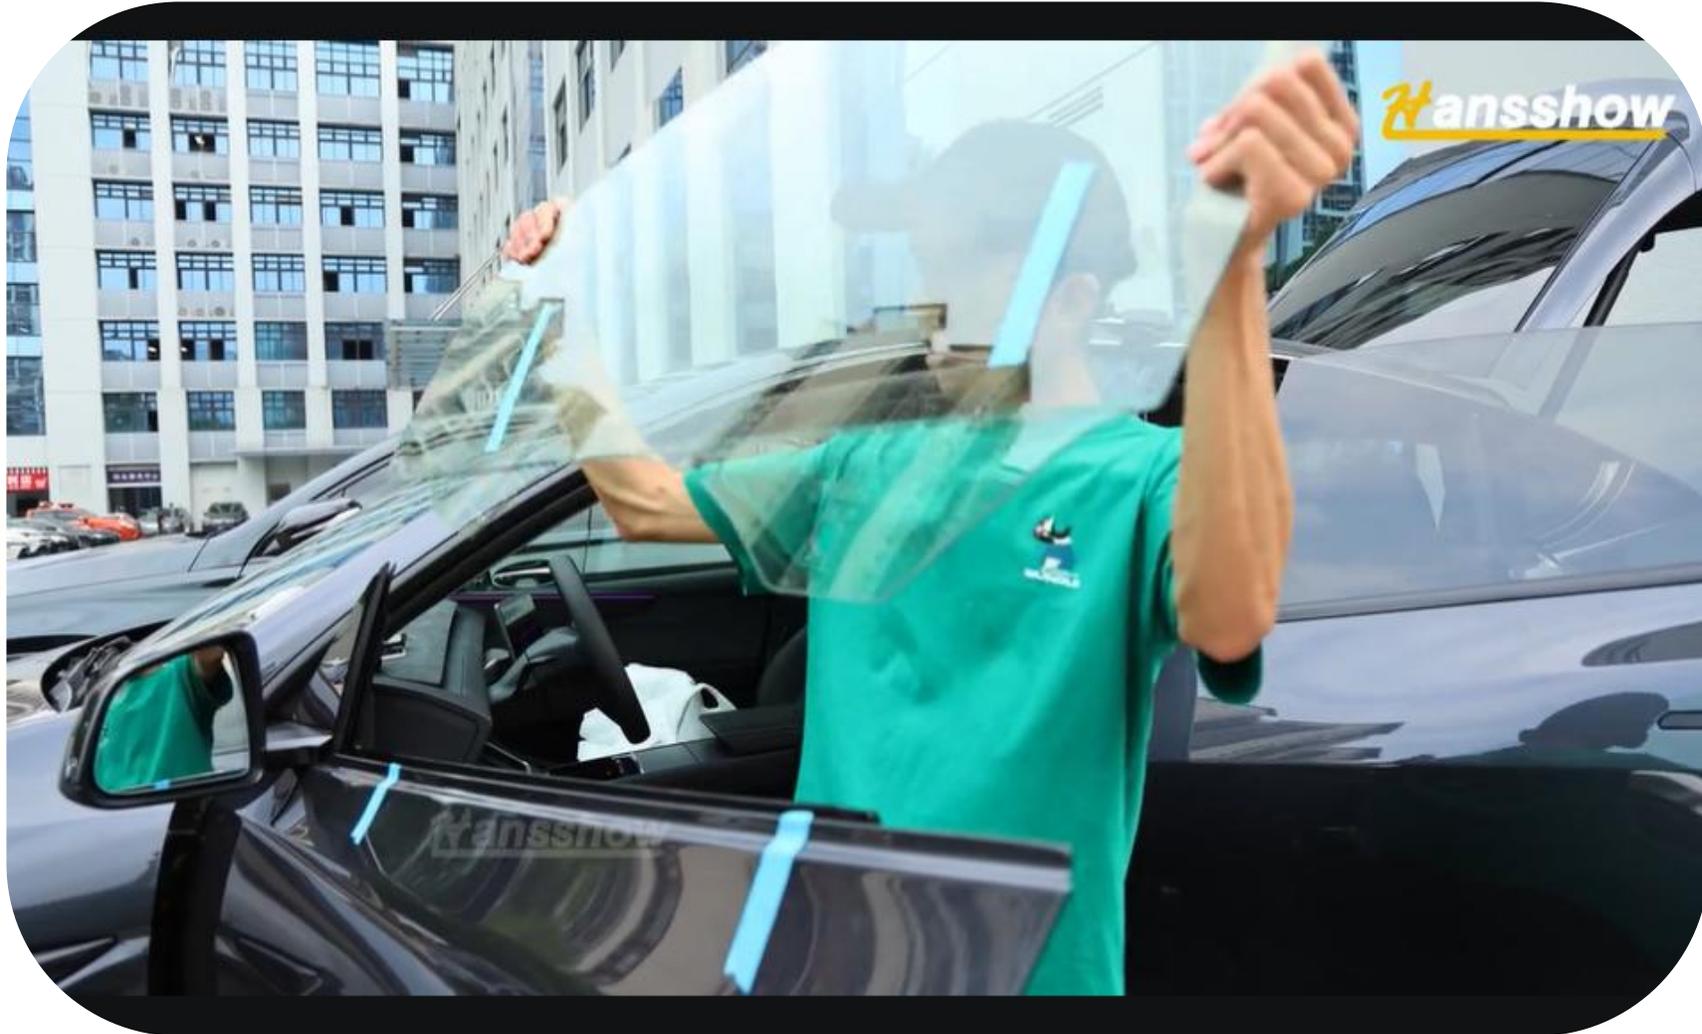



23.Remove the window glass (same for both sides).



24. Remove all harnesses, clips, and screws from the dust cover panel (same for both sides—see installation video for details).




25.Remove the dust cover panel (lift upward and take out at an angle, same for both sides).

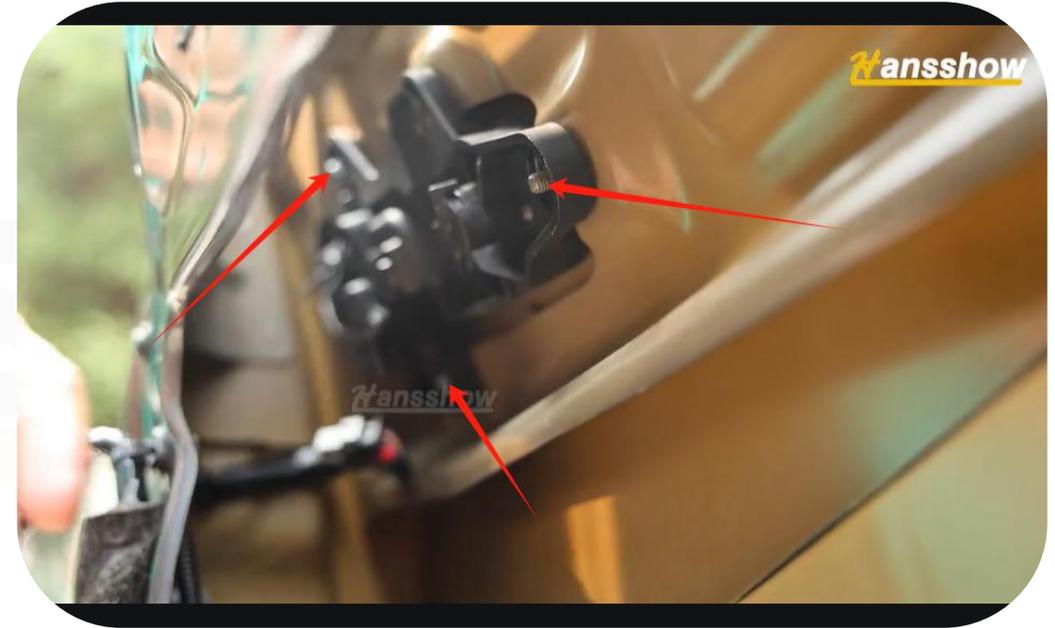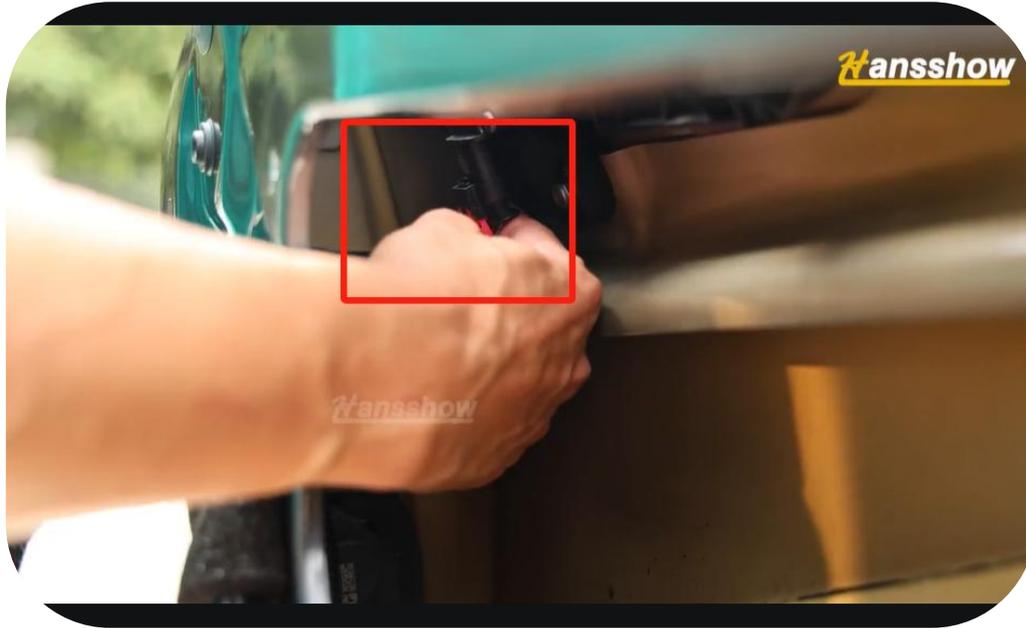

26. Unplug the door handle connector, remove three fixing screws with a 10mm socket, and take off the door handle (same for both sides).




27. Unscrew one sensor screw on the door handle as shown (same for all four doors).

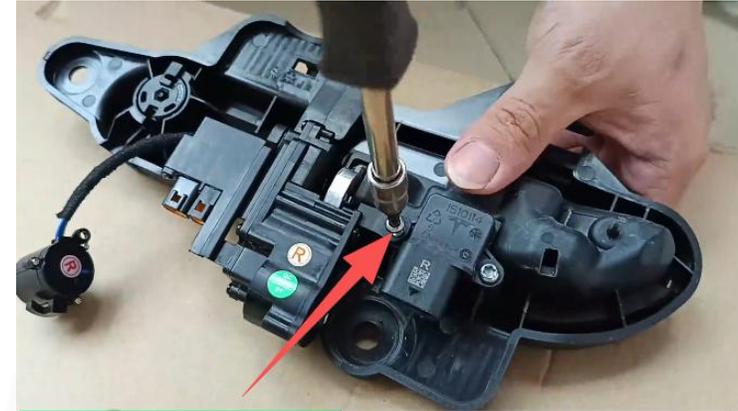


28. Install the electric door handle sensor onto the original door handle (same for all four doors).



29. Remove the original vehicle door handle sensor head (same for all four doors).

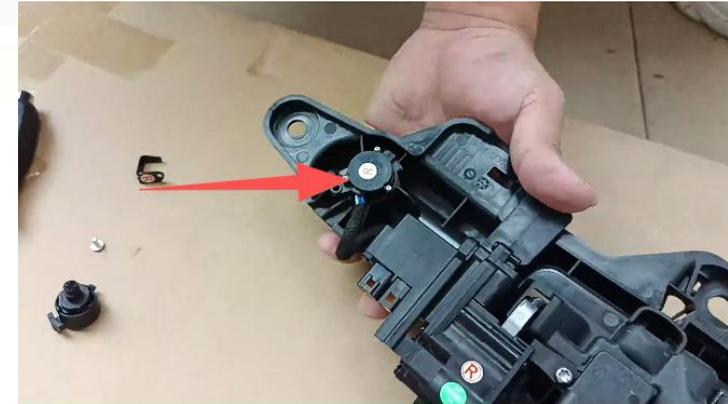

30. Install our sensor head (same for all four doors).

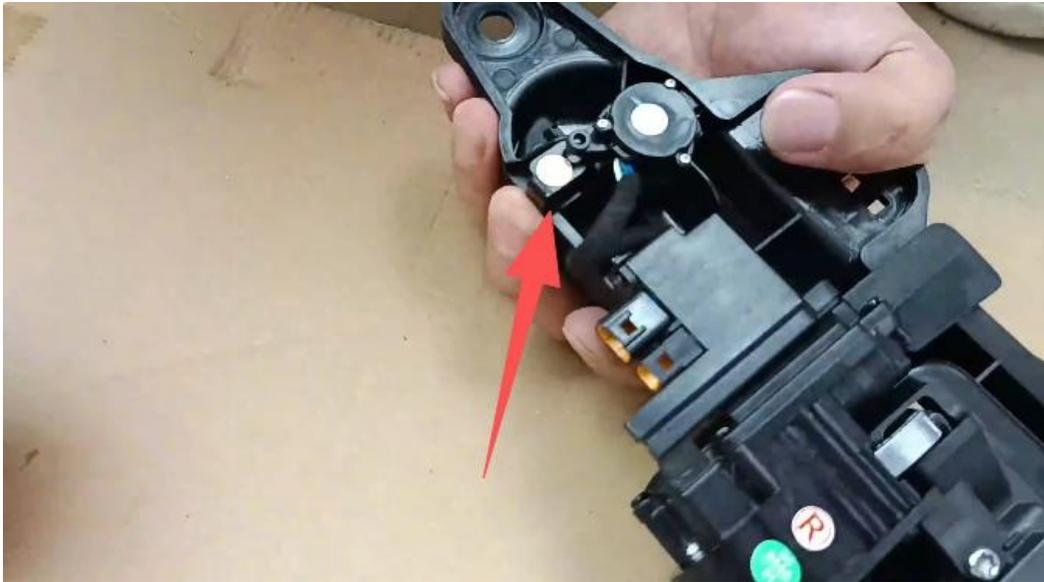

31. Install the sensor head fixing clip and tighten the screw (same for all four doors).



32. Align and install the electric door handle in position, then install and tighten the three retaining nuts (same for both sides).




33. Plug in the original door handle connector (same for both sides).



34. Pry open the waterproof corrugated tube (same for both sides).



35. Use the wire puller to run through the corrugated tube (same for both sides).

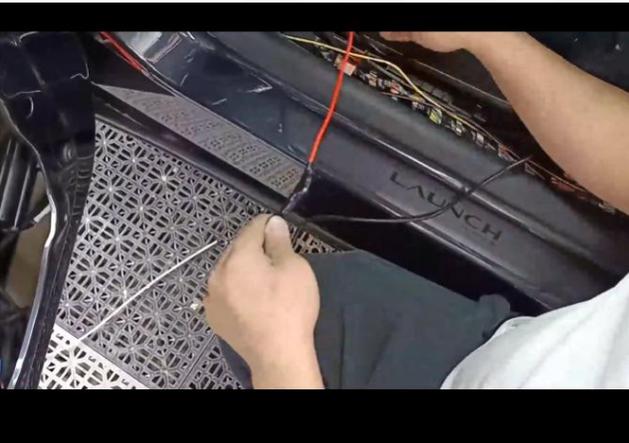

36. Tie the electric handle wiring harness to the puller (same for both sides).



37. Pull the electric handle harness to the other end of the corrugated tube as shown (same for both sides).




38.Route the harness along the corrugated tube into the door as shown (same for both sides).



39.Guide the harness over the door frame and connect it to the electric handle (same for both sides).



40. Test the electric door handle; if it functions properly, reinstall all removed parts (same for both sides).

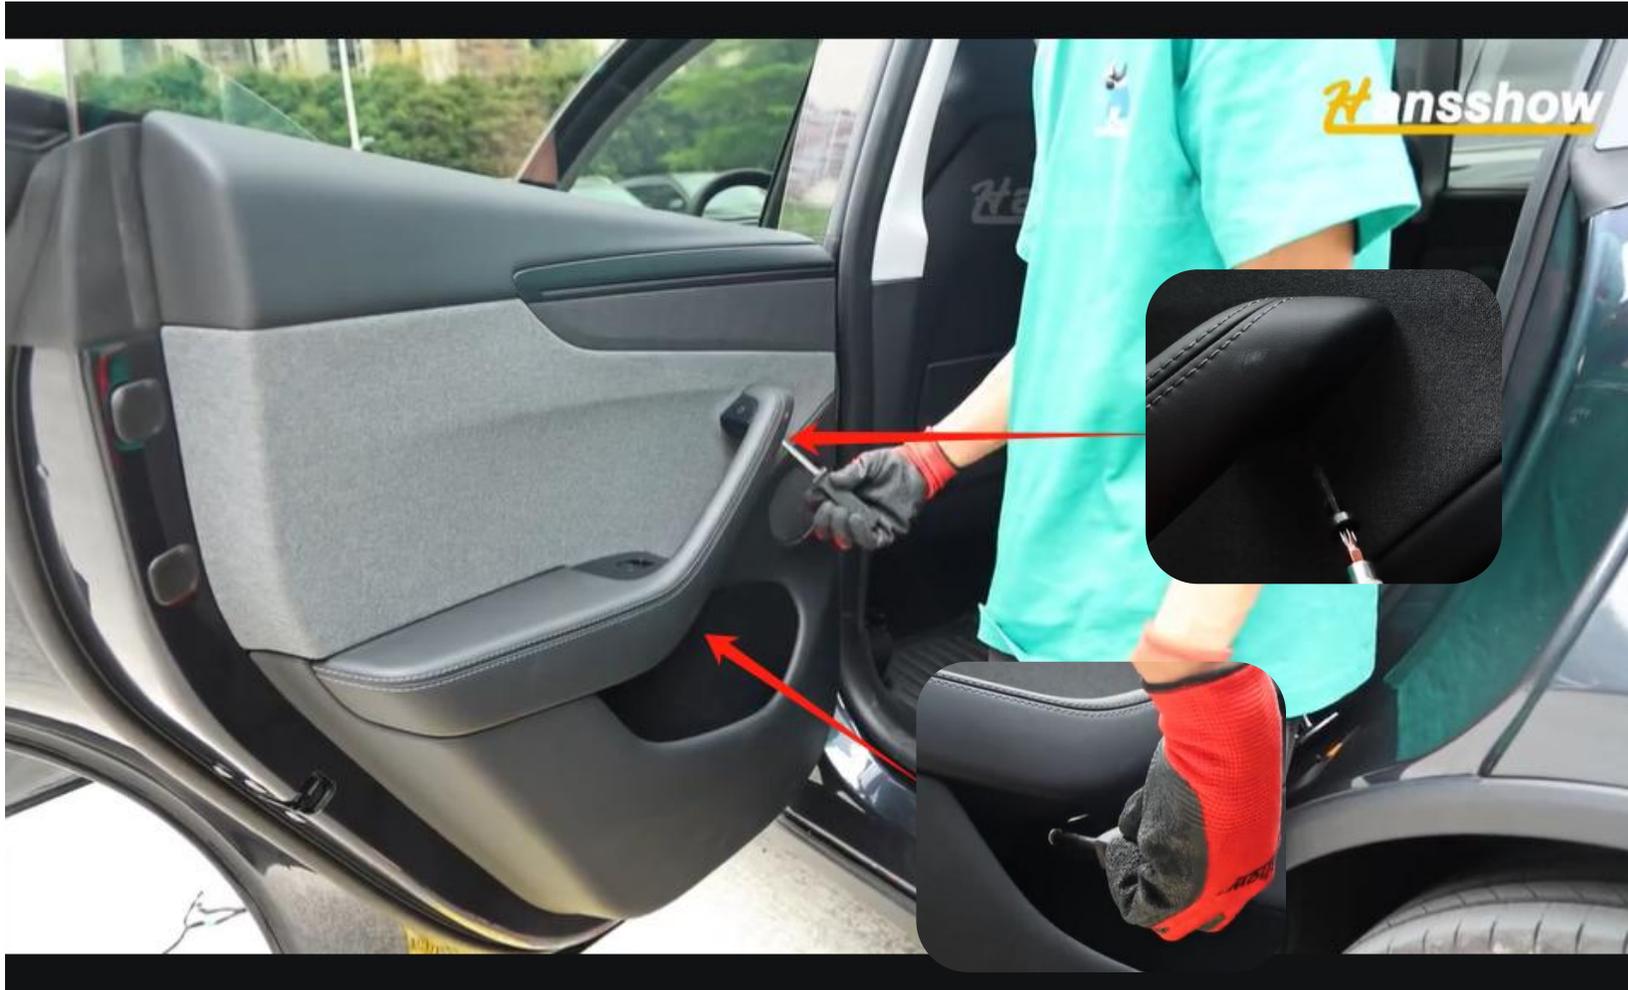


41. Remove the two mounting screws of the rear door trim panel as shown (same for both sides).



42. Pry the door panel up from the bottom using a plastic trim tool and then remove it (same for both sides).




43. Disconnect all connectors and clips from the door harness (same for both sides).

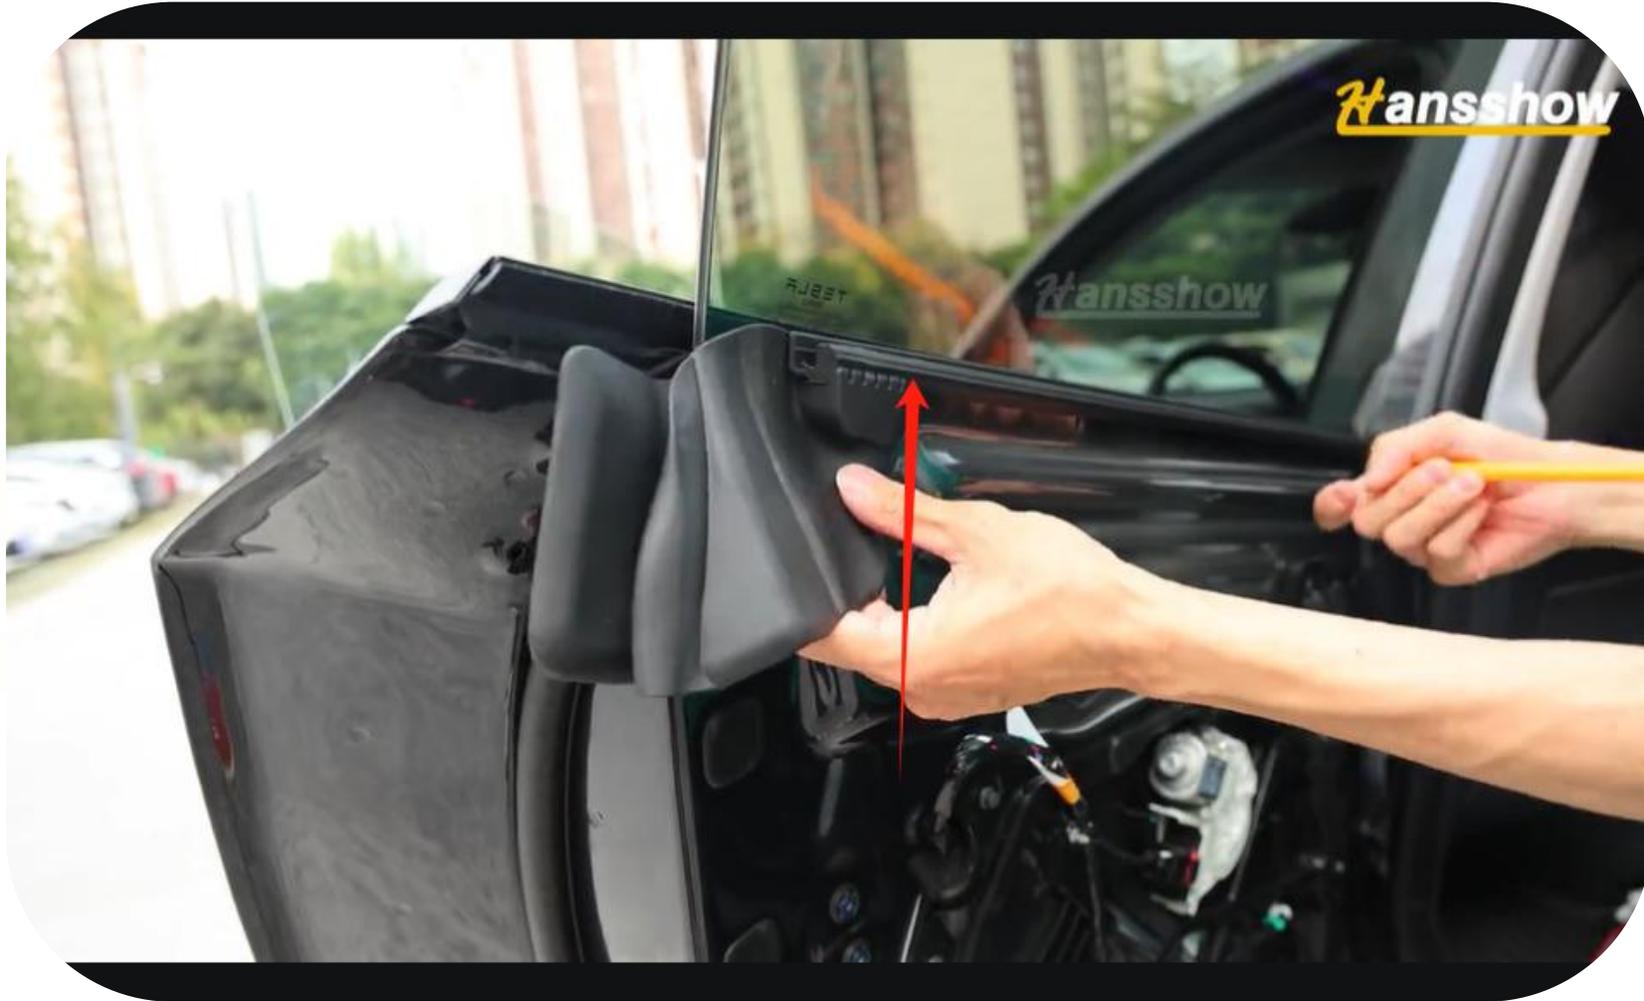



44.Remove the window trim strip (same for both sides).



45. Use a screwdriver to close the door latch (same for both sides).

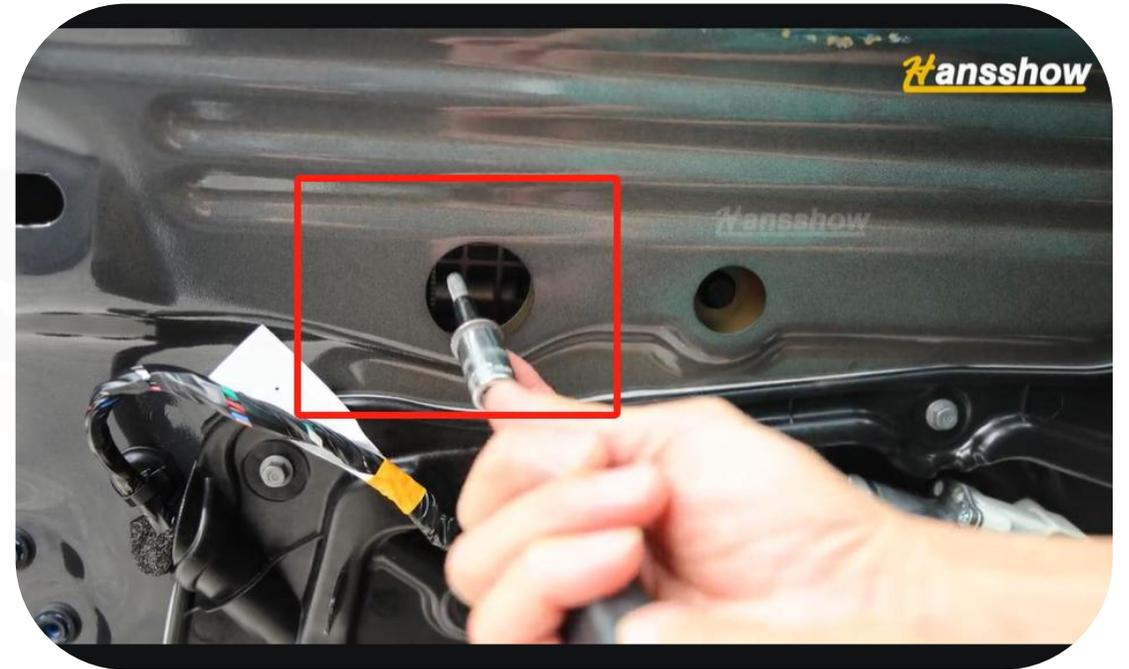

46. Unscrew the window glass screws (same for both sides).

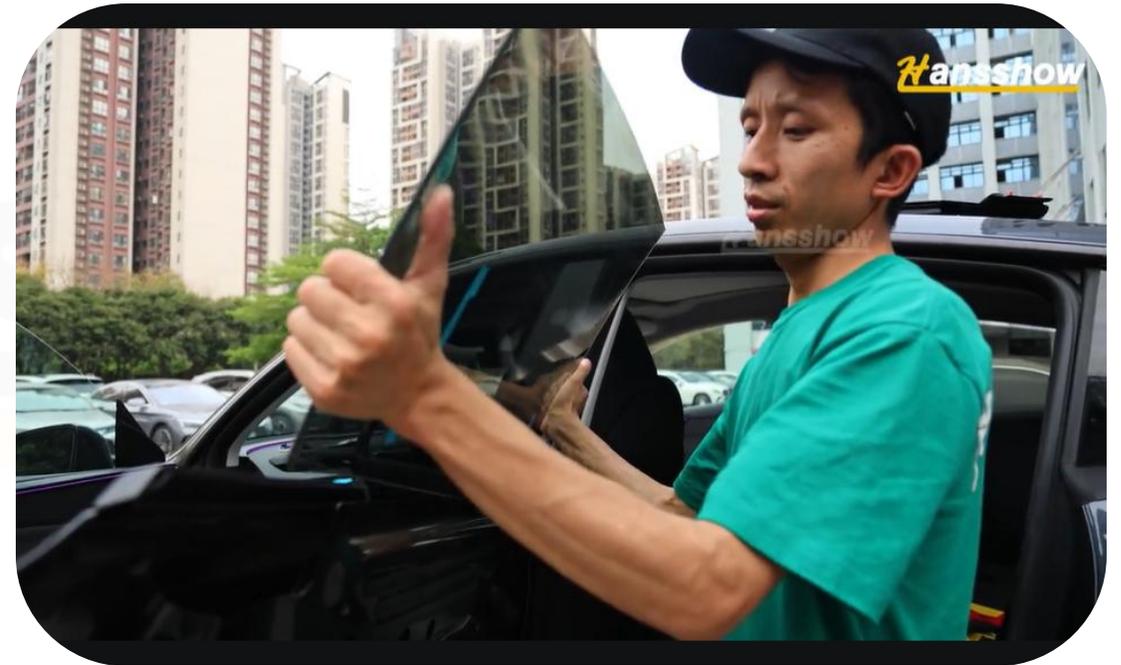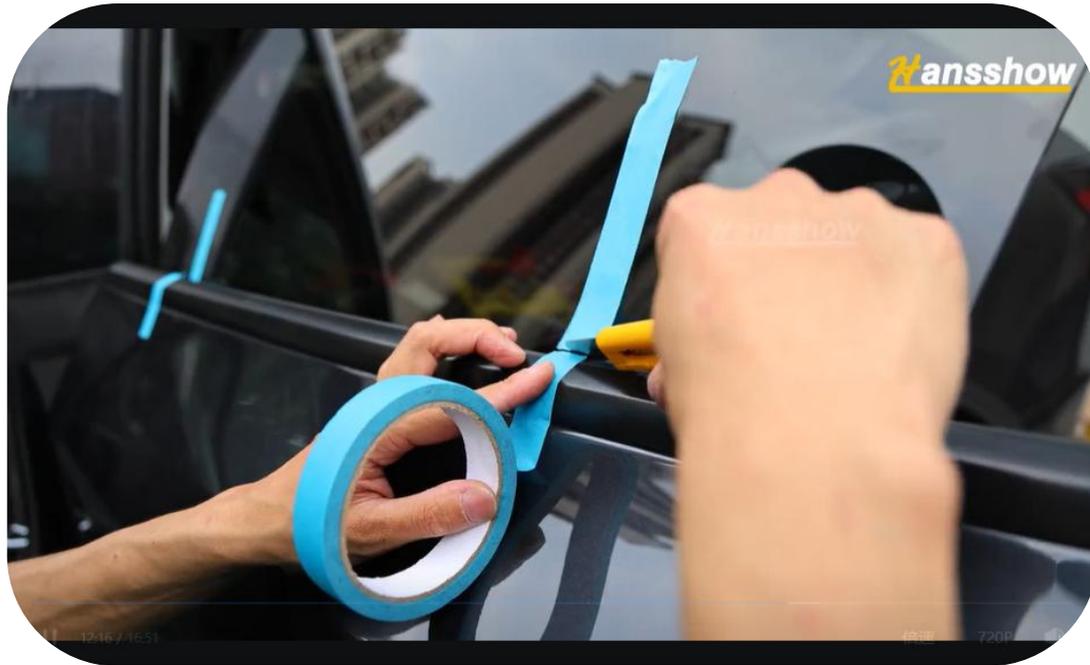

47. Apply masking tape on the outside of the door and window to prevent misalignment, then remove the window glass (same for both sides).



48. Remove all harnesses, clips, and screws on the dust cover panel (same for both sides).




49. Remove the dust cover panel (lift upward and take out at an angle, same for both sides).



50. Unplug the original door handle sensor connector, remove the three mounting screws and take off the original handle (same for both sides).




51. Unscrew one door handle sensor screw as shown (same for all four doors).

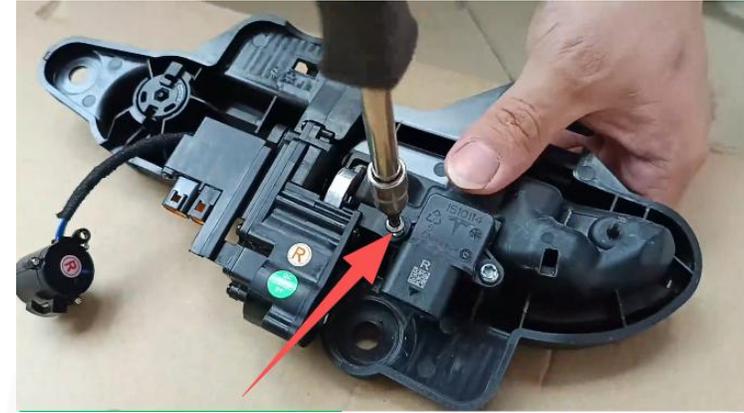


52. Install the electric door handle sensor onto the original door handle (same for all four doors).



53. Remove the original vehicle door handle sensor head (same for all four doors).

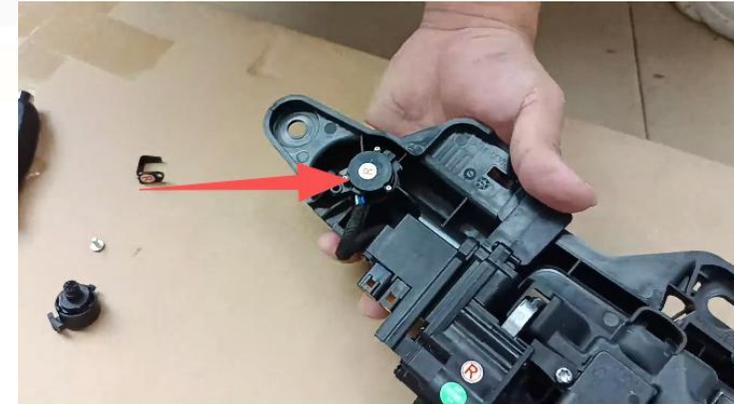


54. Install our sensor head (same for all four doors).

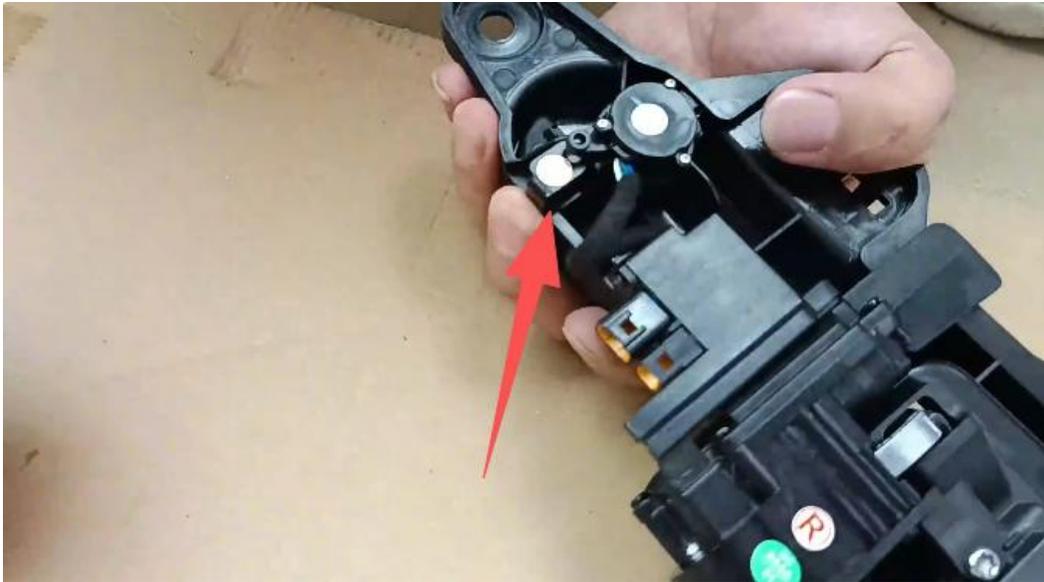

58. Install the sensor head fixing clip and tighten the screw (same for all four doors).



59. Align and install the electric door handle, tighten the mounting screws, and plug in the handle sensor connector (same for both sides).

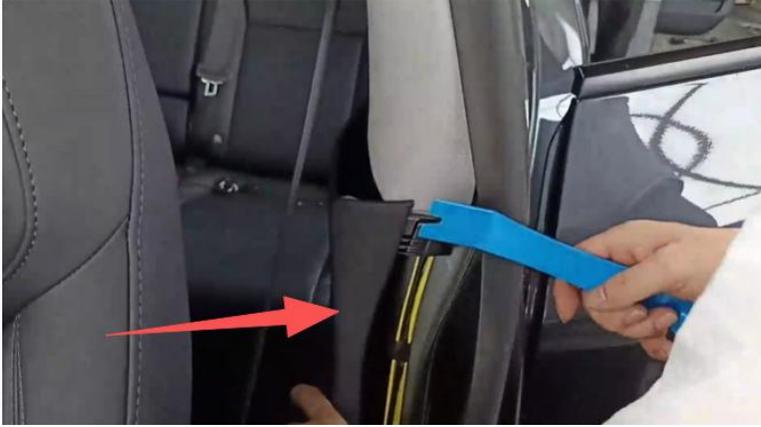

60. Remove the B-pillar interior trim panel (same for both sides).



61. Open the corrugated tube of the door connector harness (same for both sides).





62. Press the upper and lower two clips to disconnect the door connection harness (same for both sides).



63. Route the rear door handle harness through the corrugated tube (same for both sides).



64. Route the rear door handle harness into the door, secure it, and then plug it into the door handle (same for both sides).

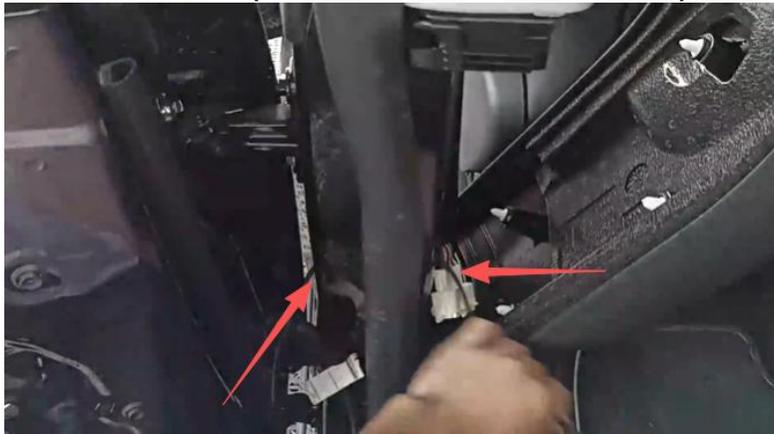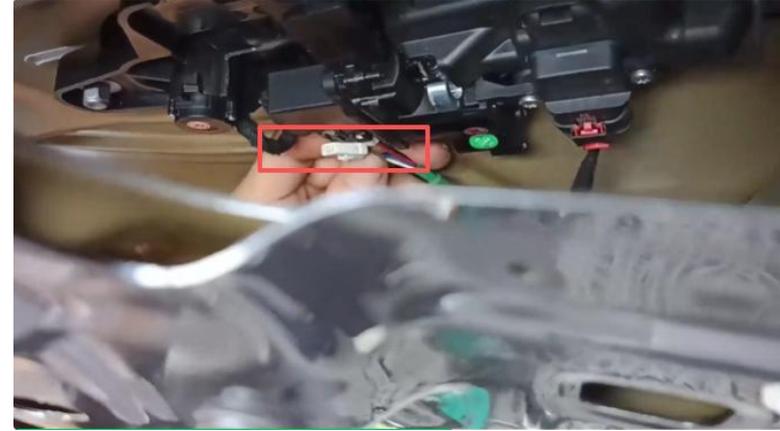

65. Pass the other end of the rear handle harness into the B-pillar (same for both sides).



66. Reconnect the door connection harness (same for both sides).





67.Route the rear door handle harness along the original sill harness to the front footwell (same for both sides).



68.Remove the passenger-side saddle trim panel.



69. Use a wire puller to route the driver's front and rear door handle harnesses to the passenger footwell.

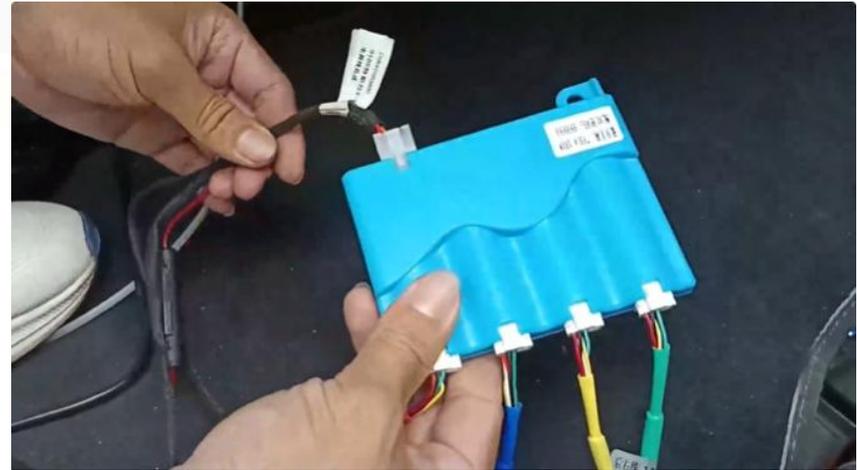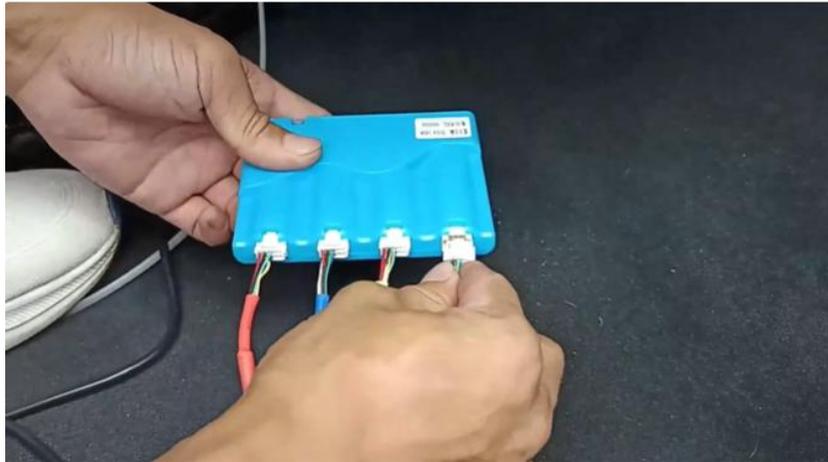

70. Plug the door handle harness into the control box, and finally connect the power plug.



71. After securing the control box, test all electric handles. If everything works correctly, reassemble step by step.



72. Installation complete.

Hansshow provides 1-year extended warranty service.  
Send us your customer number to get 1-year full warranty.

**Message and Telephone: +1949-992-7017**

**Installation Appointment:+1 (949) 358-4793**

**Email: [inquiry@hansshow.com](mailto:inquiry@hansshow.com)**

**(UTC-7/PST)9:00AM-6.30PM (Monday to Friday)**



[www.hansshow.com](http://www.hansshow.com)

Designed by HANSSHOW

## Need Help? Contact Us Now!

If you have any questions, please contact us at

  **1 (949) 992-7017**

(UTC-7/PST)9:00AM-6.30PM (Monday to Friday)

**Installation: 19493584793**  [inquiry@hansshow.com](mailto:inquiry@hansshow.com)  [www.hansshow.com](http://www.hansshow.com)

Before contacting our customer support, please have your **order number, videos, or images** (if needed) ready for a fast and great solution. Send your customer number to get Hansshow **one-year** extended warranty.